



Validation of Temperature Profile Environmental Data Records (EDRs) from the Cross-Track Infrared Microwave Sounding Suite (CrIMSS) Using COSMIC Dry Temperature Profiles

Michelle Feltz, Robert Knuteson, Henry Revercomb, Dave Tobin, and Steve Ackerman
Cooperative Institute for Meteorological Satellite Studies, University of Wisconsin-Madison




Abstract

This paper presents a methodology for validating the measurements from the Cross-Track Infrared Microwave Sounding Suite (CrIMSS) using combined observations from the Advanced Technology Microwave Sounder (ATMS) and the hyperspectral infrared Cross-track Infrared Sounder (CrIS) on the Suomi NPP satellite, the first satellite of the newly created U.S. JPSS program. The atmospheric vertical temperature profiles (AVTPs) from the CrIMSS operational product are compared to temperature profiles obtained from radio occultation (RO) from the COSMIC GPS RO network. In particular, bias, RMS, and standard deviation profile statistics will be presented for global and 30 degree latitude zones for selected time periods in 2012. Similar validation statistics using AIRS and COSMIC profile matchups will be created for the same space and time periods. The matchup methodology was used to evaluate the dependence of the ray path averaging on the statistical results by comparing the closest single AIRS profile, to the average along a ray path, and to the average of a circle of radius equal to the horizontal ray path length through the atmosphere. The optimal method of comparison between GPS RO and IR soundings from that Suomi NPP satellite will be presented. A comparison will be made of CrIMSS EDR performance relative to NASA AIRS L2 product in order to assess the CrIMSS product accuracy. This evaluation is in support of the NOAA NESDIS calibration/validation activities for the checkout of the Suomi NPP satellite.

Methodology

In this temperature profile matchup methodology, spatially and temporally coincident GPS RO profiles and IR granules were found. For each of these profile-granule matchup cases, three profile-profile matchup techniques were used for comparison and analyzed with the same statistical analysis. For each matchup case a closest profile, a circular average profile, and ray-path average profile of AIRS data were computed. In order to investigate the effect of the horizontal resolution of the GPS RO, three different approaches to creating an AIRS matchup profile were evaluated. The azimuth angle of the radio occultation for each COSMIC RO profile altitude was used to compute the horizontal extent of the nominal GPS RO horizontal resolution at each reported altitude level (Kursinski et al. 1997). The three figures below show the spatial extent of a 135 km radius averaging circle for AIRS retrieval levels. The four figures to the right illustrate the closest, circular, and raypath methods.

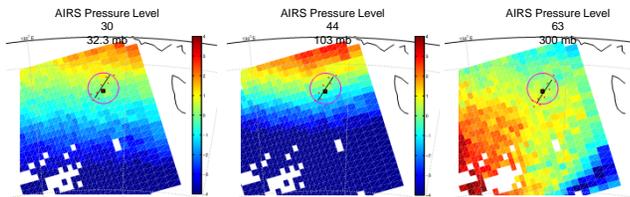

From left to right AIRS a) 32.3 mb level (AIRS Level 30), b) 103 mb (AIRS Level 44) and c) 300 mb level (AIRS Level 63) temperatures differenced from the AIRS closest profile temperature (K) showing the closest profile (black square), circular averaged profile radius (magenta circle), profiles included in the ray averaged profile (red dots), and the COSMIC RO raypath (black line).



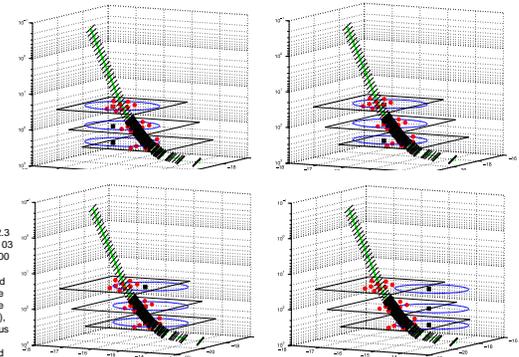


Illustration of the closest (black square), circular (blue circle), and raypath (red dots) methods for a single GPS profile (green) (atmPrf_C002.2007.292.03.14.G20_2010.2640.nc) for the circle centered at (a) 30 hPa, (b) 100 hPa, (c) 300 hPa, and (d) the perigee point of GPS RO occultation.


Satellite Data

The COSMIC Data Analysis and Archival Center-CDAC (<http://cosmic.io.cmc.ucar.edu/cdac/products.html>) was used to obtain COSMIC data. The product used was the real-time atmPrf 'dry temperature' files. A typical COSMIC profile is obtained in about 100 seconds with over 3,000 vertical samples. A quality control flag is included in the GPS RO netcdf files. For an example day, 19 October 2007, the percentage of GPS profiles marked bad was 2.5%. These bad profiles are excluded from the analysis.



AIRS looks toward the ground through a cross-track rotary scan mirror which provides +/- 49.5 degrees (from nadir) ground coverage along with views to cold space and to on-board spectral and radiometric calibration sources every scan cycle. Ninety ground footprints are observed each scan. One spectrum with all 2378 spectral samples is obtained for each footprint. The AIRS IR spatial resolution is 13.5 km at nadir from the 705.3 km orbit. The AIRS Level 2 sounding products contain atmospheric temperature and moisture profiles from about 1 mb down to the surface with a horizontal resolution of about 45 km. The AIRS Level 2 product provides nearly complete daily global coverage in ascending (day) and descending (night) modes.

The Cross-track Infrared Sounder (CrIS) and the advanced Technology Microwave Sounder (ATMS) together represent the latest addition to a long series of atmospheric satellite sounders that originated in the late 1970's. CrIS is a hyperspectral sounder that will make it possible to continue the great advances in atmospheric observations and research that started with the Atmospheric Infrared Sounder (AIRS) launched by NASA on the Aqua research satellite in 2002, and ATMS will similarly continue the series of observations that started with the Advanced Microwave Sounding Unit (AMSU) first launched by NOAA in 1998.



References

Anthon, R. A. et al., 2008: The COSMIC/FORMOSAT-3 mission: early results. *Bull. Amer. Meteor. Soc.*, 89, 313-333. doi: <http://dx.doi.org/10.1175/BAMS-89-3-313>
Borbas, E. W., P. Menzel, J. L. H. M. Woolf, 2003: Effects of GPS/RO refractivities on IR/MW retrievals. *ITSC-13*, Sainte Adele, Canada, 29 October - 4 November 2003.
Healy, S.B. and Eyring, J.R., 2000: Retrieving temperature, water vapour and surface pressure information from refractivity-index profiles derived by radio occultation: A simulation study. *Q. J. R. Meteorol. Soc.*, 126, 1563-1583.
Kursinski, E.R., Hajj, G.A., Schofield, J.T., Linnell, R.P. and Hardy, K.R., 1997: Observing Earth's atmosphere with radio occultation measurement using the Global Positioning System. *J. Geophys. Res.*, 102, 23,429-23,465.
Tobin, D. C. et al., 2006: Atmospheric state best estimates for Atmospheric Infrared Sounding temperature and water vapor retrieval validation. *J. Geophys. Res.*, 111, D09S14, doi:10.1029/2005JD006103.
Yunok et al., 2009: Use of radio occultation to evaluate atmospheric temperature data from spaceborne infrared sensors. *Terr. Atmos. Ocean. Sci.*, Vol. 20, No. 1, 73-85.

Acknowledgments

We gratefully acknowledge the NPSD (Tsai's National Space Organization) and UCAR (University Center for Atmospheric Research) for access to the COSMIC RO data. We would like to thank the Goddard Space Flight Center (GSFC) Data Archive for access to the AIRS Level 2 data products. This work was supported under JPSS NOAA grant NA15NES4400013.

Assessment of CrIMSS Version Change on October 15th, 2012


Prior to CrIMSS update

After CrIMSS update

AIRS v5 minus COSMIC


CRIMSS - COSMIC

AIRS - COSMIC

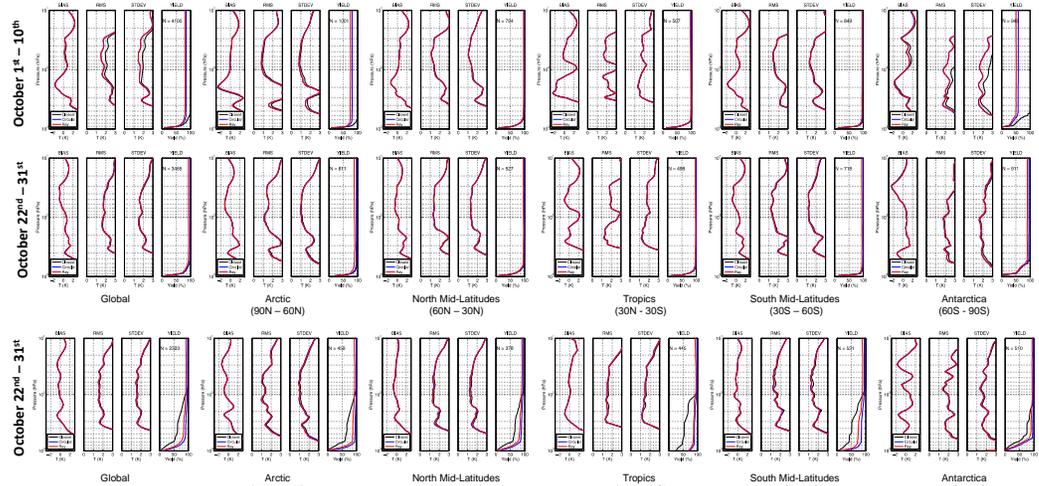


Note: The COSMIC GPS RO dry temperature is contaminated by water vapor below about 300mb.

Case Study: November 4th 2012, Madison, WI

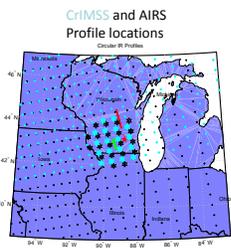

The red line indicates the track of the COSMIC GPS RO profile. The red star is the perigee point of occultation. The cyan stars indicate CrIMSS profiles within 150 km of Madison. The radiosonde track is shown in green.

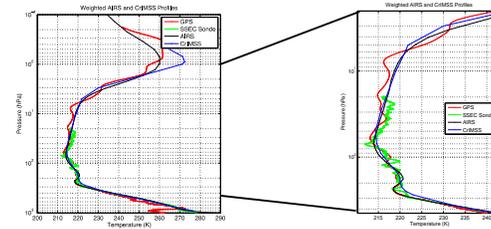

The figures above contain an overlay of the GPS RO profile (red), the radiosonde launched from UW-SSEC (green), the circular weighted AIRS profile (black), and the circular weighted CrIMSS profile (blue). The right hand figure illustrates the 300 to 30 mb pressure range for which the COSMIC dry temperature profile is most accurate. Note that both the radiosonde and COSMIC profiles have higher vertical resolution than AIRS or CrIMSS.

Conclusions

- A methodology has been developed for validation of CrIMSS AVTP in the upper troposphere and lower stratosphere using GPS radio occultation.
- GPS RO dry temperature from the COSMIC network is matched to CrIMSS profiles within one hour.
- The GPS RO horizontal resolution of 300 km is accounted for using a raypath method.
- This methodology has been used to evaluate a CrIMSS software version update that occurred on 15 October 2012.
- The same methodology has been applied to AIRS v5 retrievals to provide a relative comparison.
- The methodology is shown to be useful for validating CrIMSS products even during this beta product period.
- Coincident RS92 sonde launches from UW-Madison are being used in detailed case study analyses.