

Geostationary Operational Environmental Satellite (GOES)

GOES-R Series

General Interface Requirements Document (GIRD)

November 04, 2010



National Aeronautics and
Space Administration

Goddard Space Flight Center
Greenbelt, Maryland

ITAR RESTRICTED DATA

U.S. Citizens / US Permanent Residents ("Green Card" Holders) Only
The unclassified technical information included herein controlled under the ITAR, 22
CFR 120- 130, by the U.S. Department of State. Transfer of this information to a
foreign person or entity requires an export license issued by the U.S. Department of
State or an ITAR exemption to the license requirement prior to the export or transfer.

ITAR RESTRICTED DATA

U.S. Citizens / US Permanent Residents (“Green Card” Holders) Only
The unclassified technical information included herein controlled under the ITAR, 22
CFR 120- 130, by the U.S. Department of State. Transfer of this information to a
foreign person or entity requires an export license issued by the U.S. Department of
State or an ITAR exemption to the license requirement prior to the export or transfer.


Check the VSDE at <https://goesv3.ndc.nasa.gov> to verify correct version prior to use.

Geostationary Operational Environmental Satellite (GOES)

GOES-R Series

General Interface Requirements Document (GIRD)


Prepared By:



Alexander Krimchansky, Systems Manager

5/5/04
Date

Reviewed By:

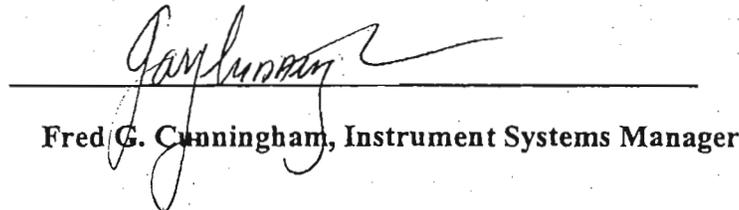

Fred G. Cunningham, Instrument Systems Manager

5/5/04
Date

Approved By:



Martin A. Davis, GOES/POES Program Manager

5/5/04
Date

/Systems Engineering

GIRD

417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

Version: 2.24

Printed by: dharrison

Printed on: Tuesday, December 07, 2010

No filter applied.

No sort applied.

Contents

1	SCOPE	1
1.1	Introduction	1
1.2	Requirements Terminology (CCR 00098)	1
1.3	Order of Precedence	2
2	Documents	3
2.1	Applicable Documents	3
2.2	Reference Documents	3
3	Requirements	4
3.1	General Requirements	4
3.1.1	Instrument Modes	4
3.1.1.1	Mode Changes External Harm	4
3.1.1.2	Power Off Mode	4
3.1.1.3	Instrument Safe Mode	4
3.1.1.4	Survival and Storage Modes	4
3.1.2	Operational Concepts	4
3.1.2.1	Pre-Launch	4
3.1.2.2	Launch and Orbit Raising	4
3.1.2.3	On-Orbit Concept	5
3.1.3	Dimension Standard	5
3.1.4	Coordinates	5
3.1.5	Yaw Flip	6
3.2	Interface Requirements	6
3.2.1	Mechanical	6
3.2.1.1	Instrument Envelopes	6
3.2.1.2	Fields of View	6
3.2.1.3	Mass Properties	7
3.2.1.4	Mounting	7
3.2.1.5	Alignment	9
3.2.1.6	Access	10
3.2.1.7	Attitude and Disturbances for Nadir Pointed Instruments (CCR 00332)	10
3.2.1.8	Reserved (CCR 00095)	13
3.2.1.9	Flight and Non-Flight Equipment	14
3.2.2	Thermal	14
3.2.2.1	Thermal Control Concept	14
3.2.2.2	Heat Transfer	15
3.2.2.3	Interface Temperatures	16

3.2.2.4	Temperature Monitoring	16
3.2.2.5	Heater Power and Heater Control	16
3.2.2.6	Thermal Interfaces	16
3.2.2.7	Multi-layer Insulation	17
3.2.3	Instrument Electrical Power	17
3.2.3.1	Electrical Power Interfaces	17
3.2.3.2	Power Specifications (CCR 00161B)	17
3.2.4	Instrument Electrical Power Grounding	23
3.2.4.1	Instrument Operational Power Grounding	23
3.2.4.2	Instrument Survival Heater Power Grounding	25
3.2.4.3	Instrument Secondary Power Grounding	25
3.2.4.4	Instrument Electrical Signal Grounding	25
3.2.4.5	Instrument Electrical Accommodations	26
3.2.5	Command and Data Handling	26
3.2.5.1	Data Transfer Between the Instrument and Spacecraft	26
3.2.5.2	SpaceWire Layer Support	26
3.2.5.3	SpaceWire Data Bus	26
3.2.5.4	Source Packet Format	27
3.2.5.5	SpaceWire Data Rate	28
3.2.5.6	Instrument to Spacecraft Data Volume	28
3.2.5.7	Pulse Per Second (PPS)	28
3.2.5.8	Ancillary Data	29
3.2.5.9	Control and Monitoring	29
3.2.6	Environmental Conditions	31
3.2.6.1	On-Orbit Radiation Environment	31
3.2.6.2	Launch Environment	31
3.2.6.3	On-Orbit Environment	38
3.3	Attitude and Orbit Data	39
3.3.1	Attitude Knowledge	39
3.3.1.1	Representation	39
3.3.1.2	Accuracy	39
3.3.1.3	Update Rate	40
3.3.1.4	Latency	40
3.3.1.5	Stability (CCR 01015A)	40
3.3.2	Spacecraft Angular Rate	40
3.3.2.1	Representation	40
3.3.2.2	Accuracy	40
3.3.2.3	Bandwidth	41
3.3.2.4	Update Rate	41
3.3.2.5	Phase Delay	41
3.3.3	Spacecraft Orbit	41

3.3.3.1	Representation	41
3.3.3.2	Accuracy	41
3.3.3.3	Update Rate	41
3.3.3.4	Latency	42
3.3.3.5	Stability (CCR 01015A)	42
3.4	Instrument GSE to Spacecraft I&T GSE Interface	42
3.5	Contamination Control	42
3.5.1	Instrument and Spacecraft Ground Processing	42
3.5.1.1	Facility Requirements	42
3.5.1.2	Ground Support Equipment Requirements	43
3.5.1.3	Purge Requirements	43
3.5.1.4	Ground Storage/Transportation Requirements	43
3.5.2	Mission Considerations	43
3.5.2.1	Design	44
3.5.2.2	Mission Performance	44
3.6	Acronyms	44

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1	1	1 SCOPE
GIRD2	1.1	1.1 Introduction
GIRD3	1.1.0-1	<p>This General Interface Requirements Document (GIRD) sets forth the general, mechanical, thermal, electrical power, command and data handling and contamination control interface requirements imposed on both the instruments and spacecraft for the Geosynchronous Operational Environmental Satellite (GOES) -R Series System. It also defines the general environments to which the satellite will be subjected. The spacecraft contractor and the instrument contractor shall each meet their respective interface requirements defined in this document.</p> <p>The Unique Instrument Interface Document (UIID) for an instrument defines the specific resource allocations, documents exceptions to the GIRD requirements and constraints, and defines the special requirements not specifically covered in the GIRD. The instrument contractor will create and maintain, with government approval, an Instrument Descriptive Document (IDD) which describe the detail instrument design and unique interface requirements. The GIRD, in conjunction with the UIID and the IDD establishes the instrument-to-spacecraft interface requirements.</p> <p>Interface Control Documents (ICDs) will define the specific details of the complete spacecraft to instrument interface information (i.e., mechanical, electrical power, command and data handling, and thermal interfaces). These will be developed by the spacecraft contractor to document the Instrument-Spacecraft interface. The spacecraft contractor will control the ICDs and the ICDs will replace the related IDD.</p>
GIRD4	1.2	1.2 Requirements Terminology (CCR 00098)
GIRD1154	1.2.0-1	The following requirements terminology is used throughout this document: (CCR 00098)
GIRD1146	1.2.0-2	<p>The term “<i>shall</i>” designates a requirement that must be achieved and is synonymous with the term “<i>threshold</i>.”</p> <p>The term “<i>should</i>” designates a desired level of performance the government would like the contractor to strive towards achieving and is synonymous with the term “<i>goal</i>.”</p> <p>All other terms, including “<i>will</i>”, only designate statements of fact or intentions of the government and are not to be interpreted as contractor requirements. (CCR 00098)</p>
GIRD1147	1.2.0-3	The term “TBD” means, “to be determined.” This is applied to requirements or values that have not been defined. The contractor shall propose a requirement or value and provide a rationale for all TBD requirements. (CCR 00098)
GIRD1148	1.2.0-4	TBD requirement proposals shall be made in coordination with the government and may involve other contractors. (CCR 00098)
GIRD1149	1.2.0-5	The contractor shall request approval from the government before proceeding with its proposed TBD requirement or value. (CCR 00098)
GIRD1150	1.2.0-6	The term “TBR” means, “to be reviewed.” This is applied to requirements or values that are subject to review by the government and the contractor. The contractor shall review and suggest a modified value and rationale for all TBR requirements. The “TBR” provides an indication that the value may change upon review. (CCR 00098)
GIRD1151	1.2.0-7	TBR requirement proposals shall be made in coordination with the government and may involve other contractors. (CCR 00098)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1152	1.2.0-8	The contractor shall request approval from the government before proceeding with its proposed TBR requirement or value. <i>(CCR 00098)</i>
GIRD1153	1.2.0-9	The term “TBS” means, “to be supplied.” The government will supply TBS requirements. The government will provide a date or milestone at which each TBS requirement will be supplied. <i>(CCR 00098)</i>
GIRD5	1.2.0-10	An instrument may comprise more than one physical assembly, or unit. “Sensor unit” refers to the unit that contains the optics. “Instrument unit” means the sensor unit, electronics box (if applicable), or other units of the instrument. <i>(CCR 00098)</i>
GIRD6	1.3	1.3 Order of Precedence
GIRD7	1.3.0-1	The order of precedence of interface requirements documents is the UIID at the highest level, followed in order by the GIRD, ICD, and IDD.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD10	2	2 Documents
GIRD1060	2.1	2.1 Applicable Documents
GIRD11	2.1.0-1	<p>The following documents of the exact issue shown form a part of this GIRD to the extent specified herein. In the event of conflict between the documents referenced and the contents of this GIRD the latter shall be the superseding requirement.</p> <p>MIL-STD-461E Aug 99 - Requirements for the Control of Electromagnetic Interference Characteristics of Subsystems and Equipment</p> <p>ECSS-E-50-12A - Space Wire - Links, Nodes, Routers and Networks, 24 January 2003 European Cooperation for Space Standardization (ECSS)</p> <p>ISO/DIS 14644-1 - Cleanrooms and Associated Controlled Environments, May 1, 1999 (CCR 00158)</p> <p>CCSDS 133.0-B-1 Space Packet Protocol, Blue Book, Issue 1, September 2003 (CCR 00158)</p> <p>IEEE/ASTM SI-10 - American National Standard for Use of the International System of Units (SI): The Modern Metric System, December 2002 (CCR 00158)</p> <p>417-R-RPT-0027 - The Radiation Environment for Electronic Devices on GOES-R Series Satellites, August 14, 2006 (CCR 00274)</p> <p>CCSDS 301.0-B-3 - Time Code Formats. Blue Book. Issue 3, January 2002</p> <p>NASA/TM-2001-211221 - Guideline for the Selection of Near-Earth Thermal Environment Parameters for Spacecraft Design, October 2001</p> <p>417-R-RPT-0050 - GOES-R Reliable Data Delivery Protocol Version 2.1 January 16, 2008 (CCR 00109) (CCR 00213) (CCR 00274) (CCR 00372) (CCR 01320)</p> <p>ISO/DIS 14644-3 Cleanrooms and associated controlled environments - Part 3: Metrology and test methods, 9/26/02 (CCR 00115)</p> <p>SN-C-0005 Revision D, Contamination Control Requirements, July 20,1998 (CCR 00115)</p>
GIRD1061	2.2	2.2 Reference Documents
GIRD1062	2.2.0-1	<p>Spacecraft Attitude Determination and Control, edited by James R. Wertz (Boston: Reidel, 1978), pp. 268-270.</p> <p>Farrenkopf, R. L., "Analytic Steady-State Accuracy Solutions for Two Common Spacecraft Attitude Estimators," Journal of Guidance and Control (Reston, VA: American Institute of Aeronautics and Astronautics), July-August, 1978, Vol. 1, No. 4, pp. 282-284.</p> <p>Markley, F. Landis, and R. G. Reynolds, "Analytic Steady-State Accuracy of a Spacecraft Attitude Estimator," Journal of Guidance, Control, and Dynamics (Reston, VA: American Institute of Aeronautics and Astronautics), November-December, 2000, Vol. 23, No.6, pp. 1065-1067.</p> <p>CCSDS 701.0-B-3 - Recommendations for Advanced Orbiting Systems, Networks and Data Links, Architectural Specification, June 1, 2001 (CCR 00158)</p>

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD12	3	3 Requirements
GIRD13	3.1	3.1 General Requirements
GIRD14	3.1.1	3.1.1 Instrument Modes
GIRD18	3.1.1.1	3.1.1.1 Mode Changes External Harm
GIRD19	3.1.1.1.0-1	The instrument shall transition from its current mode to any other mode without harming any other instrument or spacecraft bus component.
GIRD20	3.1.1.2	3.1.1.2 Power Off Mode
GIRD21	3.1.1.2.0-1	The Instrument Power OFF Mode shall not draw operational power.
GIRD26	3.1.1.3	3.1.1.3 Instrument Safe Mode
GIRD28	3.1.1.3.1	3.1.1.3.1 Instrument Safe Mode Command
GIRD29	3.1.1.3.1.0-1	The instrument shall enter Instrument Safe Mode upon receipt of a safeing command from the spacecraft.
GIRD30	3.1.1.3.2	3.1.1.3.2 Instrument Safe Mode Timeout
GIRD31	3.1.1.3.2.0-1	The instrument shall enter Instrument Safe Mode upon the detection of 10 consecutive missing time messages.
GIRD34	3.1.1.4	3.1.1.4 Survival and Storage Modes
GIRD35	3.1.1.4.0-1	The spacecraft shall provide survival heater power in Survival and Storage modes.
GIRD1134	3.1.1.4.0-2	The instrument shall not draw operational power while in Survival and Storage modes.
GIRD38	3.1.2	3.1.2 Operational Concepts
GIRD39	3.1.2.1	3.1.2.1 Pre-Launch
GIRD40	3.1.2.1.0-1	The satellite will be transported to the launch site where final vehicle preparations and checkout will be accomplished.
GIRD838	3.1.2.1.0-2	Final inter-segment and system verification tests will be accomplished prior to launch.
GIRD839	3.1.2.1.0-3	Instrument testing and inspection to be accomplished at the launch site will be documented in the ICD.
GIRD41	3.1.2.2	3.1.2.2 Launch and Orbit Raising
GIRD42	3.1.2.2.0-1	During launch the various spacecraft subsystems may be powered on or turned off in order to provide protection from the launch and injection environments or to comply with other specified requirements. Spacecraft telemetry to monitor vehicle status may be provided during launch. Transmission of launch vehicle telemetry may satisfy this requirement during the launch phase. During the Orbit Raising and after insertion into its operational orbit, appropriate deployments would be initiated by command. Spacecraft telemetry transmission to ground monitoring stations would be used to the extent practicable.
GIRD1076	3.1.2.2.0-2	The instrument will be in Survival Mode during launch.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD840	3.1.2.2.0-3	The instrument contractor will identify in the IDD the required configuration of the instrument for the launch environment, and the power required, in the event the mode is to be anything other than OFF, and also to document required sequences leading up to the pre-launch OFF mode.
GIRD43	3.1.2.3	3.1.2.3 On-Orbit Concept
GIRD44	3.1.2.3.0-1	The satellite will operate in a geosynchronous orbit (Semi-major axis of approximately 42,164 Km) located at either 75° or 137° west longitude. Normal on-orbit operations entail periodic station keeping maneuvers that keep the satellite within a 0.5° inclination about the equator and within ±0.5° of the on-station longitude. (CCR 01183)
GIRD841	3.1.2.3.0-2	The spacecraft will be 3-axis stabilized.
GIRD842	3.1.2.3.0-3	Instruments shall survive an anomaly resulting in a static instrument line-of-sight (LOS) such that the sun passes through the LOS at orbit rate.
GIRD45	3.1.2.3.0-4	Instruments shall survive a spacecraft attitude anomaly resulting in the sun being at an arbitrary fixed location within the instrument field of regard (FOR).
GIRD46	3.1.2.3.0-5	Instruments shall survive a spacecraft attitude anomaly resulting in the sun sweeping through the field-of-view (FOV) of the instrument radiator from “horizon to horizon” at a rate of 6°/minute, passing through radiator normal.
GIRD47	3.1.3	3.1.3 Dimension Standard
GIRD48	3.1.3.0-1	For all documents related to instrument interfaces, the spacecraft and instrument contractors shall use the International System of Units (SI) for all measurement units in accordance with <u>IEEE/ASTM SI-10</u> . The contractor may include English units in parenthesis for clarification.
GIRD51	3.1.4	3.1.4 Coordinates
GIRD52	3.1.4.0-1	The orbit reference frame (ORF) shall be defined as follows: (CCR 00005)
		<p>The ORF is orthogonal and right-handed. The ORF origin is at the spacecraft center of mass. The ORF +z axis points toward the center of the Earth. The ORF +y axis points along the negative orbit normal. The ORF +x axis completes the triad.</p>
GIRD53	3.1.4.0-2	The body reference frame (BRF) shall be defined as follows: (CCR 00005)
		<p>The BRF is orthogonal and right-handed. The BRF is fixed to the body of the spacecraft. The location of the BRF origin will be specified by the spacecraft contractor. The BRF axes are nominally parallel to the ORF axes when spacecraft attitude is in its nominal Earth-pointing, upright yaw attitude with zero attitude error. The roll, pitch, and yaw axes are defined to be parallel to the BRF x, y, and z axes, respectively.</p>
GIRD54	3.1.4.0-3	If there is a yaw-flip, the spacecraft will be flown upright (+Y BRF pointed in the +Y ORF direction) during northern hemisphere winter and inverted (+Y BRF pointed in the -Y ORF direction) during northern hemisphere summer. i.e., the +Y BRF axis is generally in the same hemisphere as the Sun.
GIRD55	3.1.4.0-4	If there is no yaw-flip, the spacecraft will be flown upright all year.
GIRD870	3.1.4.0-5	The reference coordinate system of each instrument unit shall be nominally parallel to the spacecraft BRF coordinate system, with the exception of solar-pointing instruments.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD871	3.1.4.0-6	The origin of the coordinate system of each instrument unit shall be located and defined inside the mechanical envelope of the instrument unit.
GIRD1135	3.1.5	3.1.5 Yaw Flip
GIRD1136	3.1.5.0-1	For an instrument with passive cryogenic detector cooling, the GOES spacecraft will be rotated 180° about the Z-axis (yaw) twice per year to keep the -Y axis side of the spacecraft shaded, within ±4 days of the Sun crossing the orbit plane.
GIRD1137	3.1.5.0-2	The rotation will be performed any time during the 8-day window and will be carried out such that neither the Sun nor Earth illuminates the cooler during the maneuver. The maneuver is expected to last less than 1 hour. The net effect reverses the sign of the roll and pitch axes while maintaining yaw pointing at nadir.
GIRD56	3.2	3.2 Interface Requirements
GIRD931	3.2.0-1	All instrument-to-spacecraft interfaces shall be single fault tolerant.
GIRD57	3.2.1	3.2.1 Mechanical
GIRD58	3.2.1.1	3.2.1.1 Instrument Envelopes
GIRD59	3.2.1.1.0-1	The instrument units shall meet the dimensional envelope constraints defined in the UIID under conditions encountered during launch, deployment, and on-orbit operations.
GIRD60	3.2.1.1.1	3.2.1.1.1 Envelope Documentation
GIRD61	3.2.1.1.1.0-1	The instrument contractor will document the instrument unit envelopes in the IDD by engineering drawings with a set of “not to exceed” dimensions. The instrument envelopes will be inclusive of the thermal blankets.
GIRD62	3.2.1.1.1.0-2	The instrument contractor will ensure that the swept or deployed volume includes tolerances, distortions and misalignments.
GIRD63	3.2.1.1.2	3.2.1.1.2 Critical Clearances
GIRD65	3.2.1.1.2.0-1	The satellite shall fit within the dynamic envelope of the launch vehicle fairing as described in the satellite-to-launch vehicle ICD.
GIRD66	3.2.1.1.2.0-2	The spacecraft contractor will position the instrument units on the spacecraft to ensure that the stowed, deploying, and final deployed positions of the instrument units clear all obstacles including obstacles on the spacecraft, other instruments, and the launch vehicle.
GIRD67	3.2.1.1.2.0-3	A minimum of 2.5 cm clearance shall be maintained between the instrument units and surrounding structure.
GIRD69	3.2.1.1.2.0-4	The spacecraft contractor will implement a critical clearance analysis to ensure that the clearance rule is not violated.
GIRD70	3.2.1.1.2.0-5	The instrument thermal blankets shall not impede any deployment or mechanism motion.
GIRD72	3.2.1.2	3.2.1.2 Fields of View
GIRD73	3.2.1.2.0-1	The spacecraft shall provide the instrument fields-of-view defined in the UIID.
GIRD74	3.2.1.2.0-2	The instrument contractor will document the instrument field-of-view requirements in the IDD.
GIRD77	3.2.1.2.0-3	Instruments shall meet all performance requirements whether or not the spacecraft performs a yaw flip, except for instruments with cryogenic detectors cooled by a passive radiator.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD78	3.2.1.3	3.2.1.3 Mass Properties
GIRD79	3.2.1.3.0-1	The instrument mass shall be less than or equal to that allocated in the UIID.
GIRD80	3.2.1.3.0-2	The mass of the instrument units will be measured with an accuracy of ± 0.5 kg.
GIRD81	3.2.1.3.0-3	The instrument mass shall be constant unless mass expulsion rates and substances are allocated by the UIID.
GIRD83	3.2.1.3.0-4	The nominal launch mass with tolerances of each instrument unit will be provided to the spacecraft contractor for documentation in the ICD.
GIRD84	3.2.1.3.1	3.2.1.3.1 Center of Mass
GIRD87	3.2.1.3.1.0-1	The instrument contractor will determine the centers of mass for each flight instrument unit relative to the instrument unit coordinate system with an accuracy of ± 5 mm including launch and deployed configurations.
GIRD88	3.2.1.3.1.0-2	The launch and deployed centers of mass with tolerances of each instrument unit will be provided to the spacecraft contractor for documentation in the ICD, referenced to the instrument coordinate axes.
GIRD90	3.2.1.3.2	3.2.1.3.2 Inertia Properties
GIRD91	3.2.1.3.2.0-1	The instrument unit moment of inertia will be defined using the instrument unit coordinate frame passing through the instrument center of mass.
GIRD92	3.2.1.3.2.0-2	The instrument contractor will determine the moments and products of inertia values with an accuracy of $\pm 5\%$ of the maximum principal moment of inertia.
GIRD93	3.2.1.3.2.0-3	The launch and deployed moments and products of inertia with tolerances of each separately-mounted instrument unit, referenced to the instrument coordinate axes, will be provided to the spacecraft contractor for documentation in the ICD.
GIRD96	3.2.1.4	3.2.1.4 Mounting
GIRD97	3.2.1.4.1	3.2.1.4.1 Hardware
GIRD98	3.2.1.4.1.0-1	The spacecraft contractor will define and document all mounting hardware in the ICD and indicate the hardware provider.
GIRD99	3.2.1.4.1.0-2	Unless otherwise specified, the spacecraft contractor will provide all mounting hardware for the instrument units.
GIRD100	3.2.1.4.1.0-3	The instrument sensor unit shall mount to the spacecraft as described in the instrument UIID.
GIRD101	3.2.1.4.1.0-4	The instrument contractor will provide all kinematic mounts, plus vibration isolation and thermal isolation mounting hardware.
GIRD102	3.2.1.4.1.0-5	The instrument units will be delivered to the spacecraft contractor with flight mounts installed.
GIRD103	3.2.1.4.2	3.2.1.4.2 Method
GIRD104	3.2.1.4.2.0-1	The spacecraft and instruments shall be designed using a mounting method that accommodates manufacturing tolerances, structural distortion, thermal distortions and alignment requirements. (CCR 00096A)
GIRD1155	3.2.1.4.2.0-2	Partitioning of the mounting method tolerances, distortions, and alignment requirements between the spacecraft and the instruments shall be defined in the ICD. (CCR 00096A)


ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD105	3.2.1.4.2.0-3	The instrument units, excluding the sensor unit shall be capable of being mounted to the spacecraft with the spacecraft mounting surface in the vertical or in the horizontal position with the spacecraft mounting surface normal pointing up.
GIRD1070	3.2.1.4.2.0-4	The instrument sensor unit shall be capable of being mounted to the spacecraft with the spacecraft mounting surface in the horizontal position with the spacecraft mounting surface normal pointing up.
GIRD106	3.2.1.4.2.0-5	For instrument units with a mass greater than 15 kg, a minimum of three lifting points shall be provided.
GIRD107	3.2.1.4.2.0-6	The design of the lifting points shall allow handling with an overhead crane including when the unit is in its flight configuration.
GIRD1056	3.2.1.4.2.0-7	Each instrument unit design shall allow integration and de-integration to the spacecraft while using access constrained to the inside of the instrument dimensional envelope defined in the UIID with access penetrations into this envelope through the face of the envelope that is opposite to the mechanical interface plane.
GIRD109	3.2.1.4.2.0-8	Each instrument unit mounting method shall not require access from inside the spacecraft.
GIRD110	3.2.1.4.2.0-9	The method by which each instrument unit is mounted to the spacecraft will be defined in the ICD.
GIRD111	3.2.1.4.3	3.2.1.4.3 Handling Fixtures
GIRD112	3.2.1.4.3.0-1	The instrument contractor will provide proof tested handling fixtures for each unit with a mass greater than 15 kg.
GIRD113	3.2.1.4.3.0-2	Handling fixtures shall be designed to 5 times limit load for ultimate and 3 times limit load for yield.
GIRD114	3.2.1.4.3.0-3	Handling fixtures will be tested to 2 times working load.
GIRD115	3.2.1.4.4	3.2.1.4.4 Interface
GIRD116	3.2.1.4.4.0-1	The spacecraft mounting surface shall be flat to less than 0.83 mm per meter peak to peak.
GIRD117	3.2.1.4.4.0-2	The spacecraft contractor working with the instrument contractor will define the mechanical mounting interface requirements for each instrument unit in the ICD. Requirements include surface flatness, finish, mounting bolt size, number, material, and torque limits.
GIRD118	3.2.1.4.5	3.2.1.4.5 Location
GIRD119	3.2.1.4.5.0-1	The spacecraft contractor working with the instrument contractor will define and document the location and orientation of instrument units on the spacecraft in the ICD.
GIRD120	3.2.1.4.5.0-2	Coordinates and dimensions of the holes for mounting hardware will be specified at the mechanical interface and defined in the ICD.
GIRD121	3.2.1.4.6	3.2.1.4.6 Drill Templates
GIRD122	3.2.1.4.6.0-1	The pattern of mounting holes in a unit shall allow like units to be interchanged.
GIRD123	3.2.1.4.6.0-2	Instrument unit, spacecraft, and test fixture interfaces shall be drilled using templates to correctly establish the pattern of the mounting holes.
GIRD124	3.2.1.4.6.0-3	The drill template shall include appropriate alignment, orientation and location reference information and alignment cubes if required.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD125	3.2.1.4.6.0-4	The spacecraft contractor will document fabrication, functional requirements, and orientation information for the drill templates in the ICD.
GIRD126	3.2.1.4.6.0-5	The instrument contractor will provide an alignment drill template labeled with appropriate alignment, orientation, location reference information, and alignment cubes if necessary.
GIRD127	3.2.1.5	3.2.1.5 Alignment
GIRD135	3.2.1.5.0-1	The instrument contractor will measure the alignment between the sensor line-of-sight and the instrument alignment reference frame and deliver the results to the spacecraft contractor.
GIRD1065	3.2.1.5.0-2	The spacecraft contractor is responsible for the alignment knowledge of the input axes of the spacecraft IRU with respect to the IRU reference frame.
GIRD138	3.2.1.5.0-3	The spacecraft contractor will document all alignment measurements in an alignment report.
GIRD1066	3.2.1.5.0-4	The spacecraft and instrument contractors will negotiate and document in the ICD any relevant alignment requirements not specified in this document (GIRD).
GIRD128	3.2.1.5.1	3.2.1.5.1 Nadir Pointed Instrument Alignment (CCR 00332)
GIRD1083	3.2.1.5.1.1	3.2.1.5.1.1 References
GIRD129	3.2.1.5.1.1.0-1	The instrument shall include a permanent alignment reference on the instrument sensor unit composed of a minimum 2.54 cm alignment cube and a mounting surface datum. The instrument alignment cube defines the instrument alignment reference frame.
GIRD131	3.2.1.5.1.1.0-2	The spacecraft inertial reference unit (IRU) shall include an alignment cube mounted on the IRU. This alignment cube defines the IRU reference frame. The IRU reference frame is the navigation reference frame of the spacecraft and is nominally parallel to the BRF.
GIRD132	3.2.1.5.1.1.0-3	The spacecraft IRU and instrument alignment cube pairs shall be viewable from two orthogonal directions.
GIRD133	3.2.1.5.1.1.0-4	The instrument contractor will document the location of all instrument optical alignment cubes in the IDD.
GIRD1064	3.2.1.5.1.1.0-5	The instrument mounting frame is an orthogonal reference frame defined by the locations of the spacecraft side of the instrument mounting points. A rigorous definition of this frame will be documented in the ICD. The instrument mounting frame is nominally parallel to the BRF.
GIRD1084	3.2.1.5.1.2	3.2.1.5.1.2 Responsibilities
GIRD136	3.2.1.5.1.2.0-1	The spacecraft contractor will align the instrument alignment reference frame to the spacecraft IRU reference frame.
GIRD137	3.2.1.5.1.2.0-2	The spacecraft contractor will measure the alignment between the instrument alignment reference frame and the spacecraft IRU reference frame.
GIRD1085	3.2.1.5.1.3	3.2.1.5.1.3 Placement
GIRD140	3.2.1.5.1.3.0-1	The placement of the instrument alignment reference frame with respect to the spacecraft IRU reference frame shall be to within 0.25 degrees per axis (TBR), including variation over all launch and on-orbit environments.
GIRD1086	3.2.1.5.1.4	3.2.1.5.1.4 Initial Alignment Knowledge
GIRD142	3.2.1.5.1.4.0-1	The prelaunch alignment knowledge of the instrument alignment reference frame with respect to the spacecraft IRU input axes shall be 50 (TBR) microradians or better per axis.
GIRD1087	3.2.1.5.1.5	3.2.1.5.1.5 Reserved (CCR 01183)
GIRD1090	3.2.1.5.1.6	3.2.1.5.1.6 Alignment Rate of Change

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD144	3.2.1.5.1.6.0-1	The rate of change of the alignment of the instrument mounting frame with respect to the spacecraft IRU input axes shall not exceed 100 (TBR) microradians per hour per axis. This requirement includes on-orbit environments and spacecraft structural and thermal stability.
GIRD1091	3.2.1.5.2	3.2.1.5.2 Reserved (CCR 00095)
GIRD1092	3.2.1.5.2.1	3.2.1.5.2.1 Reserved (CCR 00095)
GIRD1093	3.2.1.5.2.1.0-1	Reserved (CCR 00077) (CCR 00095)
GIRD1094	3.2.1.5.2.1.0-2	Reserved (CCR 00077) (CCR 00095)
GIRD1095	3.2.1.5.2.1.0-3	Reserved (CCR 00077) (CCR 00095)
GIRD1096	3.2.1.5.2.1.0-4	Reserved (CCR 00095)
GIRD1097	3.2.1.5.2.1.0-5	Reserved (CCR 00077) (CCR 00095)
GIRD1098	3.2.1.5.2.2	3.2.1.5.2.2 Reserved (CCR 00095)
GIRD1099	3.2.1.5.2.2.0-1	Reserved (CCR 00077) (CCR 00095)
GIRD1100	3.2.1.5.2.2.0-2	Reserved (CCR 00077) (CCR 00095)
GIRD1101	3.2.1.5.2.2.0-3	Reserved (CCR 00077) (CCR 00095)
GIRD1102	3.2.1.5.2.2.0-4	Reserved (CCR 00077) (CCR 00095)
GIRD1103	3.2.1.5.2.3	3.2.1.5.2.3 Reserved (CCR 00095)
GIRD1104	3.2.1.5.2.3.0-1	Reserved (CCR 00077) (CCR 00095)
GIRD1105	3.2.1.5.2.4	3.2.1.5.2.4 Reserved (CCR 00095)
GIRD1106	3.2.1.5.2.4.0-1	Reserved (CCR 00095)
GIRD1107	3.2.1.5.2.5	3.2.1.5.2.5 Reserved (CCR 00095)
GIRD1108	3.2.1.5.2.5.0-1	Reserved (CCR 00095)
GIRD145	3.2.1.6	3.2.1.6 Access
GIRD146	3.2.1.6.0-1	The position of the instrument units on the spacecraft shall leave adequate clearance between the instrument and surrounding structures to provide access to instrument mounting hardware, access to instrument connectors, and space for instrument interfacing harness service loops.
GIRD147	3.2.1.6.0-2	Instrument access requirements will be documented in the ICD.
GIRD148	3.2.1.6.0-3	All instrument units to be installed, removed or replaced at the satellite level shall be accessible without disassembly of the unit.
GIRD149	3.2.1.7	3.2.1.7 Attitude and Disturbances for Nadir Pointed Instruments (CCR 00332)
GIRD150	3.2.1.7.0-1	The requirements in this section apply to nadir-pointing instruments while the instrument is on orbit and operating and also to body-mounted space environment instruments.
GIRD151	3.2.1.7.1	3.2.1.7.1 Spacecraft Attitude and Disturbances

417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

ID	Object Number	
GIRD1109	3.2.1.7.1.0-1	The interface attitude error and disturbance limits include government-held reserve and all spacecraft errors, including orbit and attitude knowledge, attitude command error, and attitude control error with all instruments operating in normal operational mode.
GIRD152	3.2.1.7.1.1	3.2.1.7.1.1 Attitude Error
GIRD153	3.2.1.7.1.1.0-1	The attitude error of the instrument mounting frame relative to the desired ORF-referenced attitude shall not exceed 360 microradians, 3-sigma, per axis. Attitude error is defined as the difference between the desired attitude and the actual, or true, attitude of the instrument mounting frame. (CCR 01015A)
GIRD1067	3.2.1.7.1.1.0-2	The instrument mounting frame attitude shall be stable to within 500 microradians, peak-to-peak, per axis, over any 60 sec window. (CCR 01015A)
GIRD154	3.2.1.7.1.2	3.2.1.7.1.2 Attitude Rate Error (CCR 01015A)
GIRD155	3.2.1.7.1.2.0-1	For a given total spacecraft gyro signal phase delay, the instrument mounting frame attitude rate error relative to the desired ORF-referenced attitude shall not exceed \pm the corresponding limit from the Total Spacecraft Gyro Signal Phase Delay and Rate Error Trade Space Figure provided below, per axis, when the rate is filtered by a fourth order Butterworth low pass filter with a -3dB frequency of 15 Hz. (CCR 00236) (CCR 01015A)

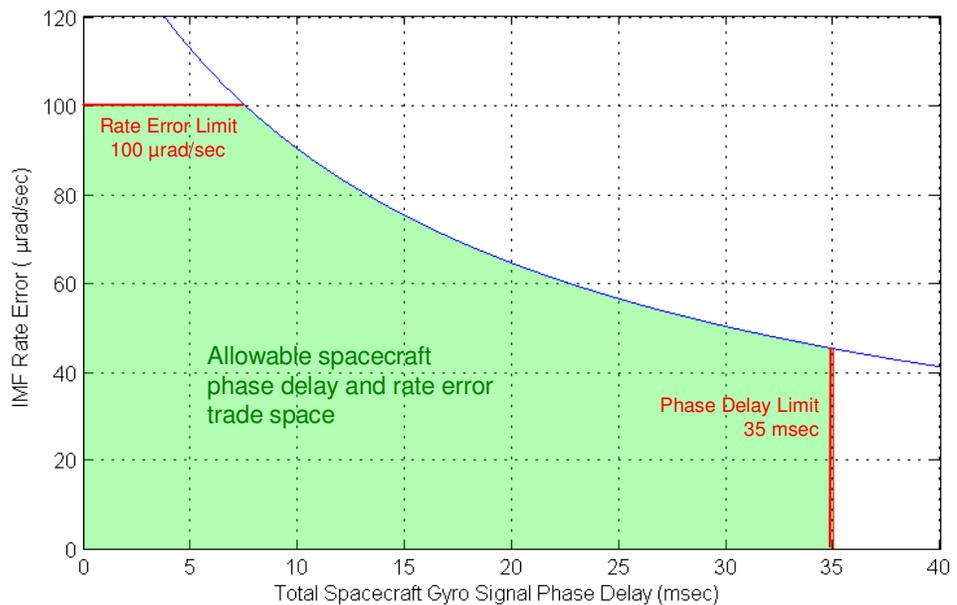

Total Spacecraft Gyro Signal Phase Delay and Rate Error Trade Space Figure

GIRD156	3.2.1.7.1.3	3.2.1.7.1.3 Spacecraft Translation Acceleration Limits
GIRD157	3.2.1.7.1.3.0-1	The translational accelerations at the spacecraft side of each instrument sensor unit mount shall not exceed the limits specified in the Translational Acceleration Limits for Spacecraft to Instrument Table below. The limits apply to each orthogonal axis after the acceleration is bandpass-filtered using at least a fourth-order band-pass Butterworth filter with -3dB frequencies of f_1 and f_2 . Note that the filter has fourth-order rolloff on both sides of the response. The accelerations can be present at any combination of the instrument sensor unit mounts and along any combination of the three orthogonal axes at each mount. (CCR 00163)

ID **Object**
Number

417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)

GIRD157 3.2.1.7.1.3.0-1

Translational Acceleration Limits for Spacecraft to Instrument Table

f₁ (Hz)	f₂ (Hz)	Peak Limit (mg)	f₁ (Hz)	f₂ (Hz)	Peak Limit (mg)	f₁ (Hz)	f₂ (Hz)	Peak Limit (mg)
0.0	512.0	18.44	26.9	30.2	0.40	114.0	128.0	2.40
0.9	10.1	1.50	28.5	32.0	0.40	120.8	135.6	2.40
6.3	32.0	1.00	30.2	33.9	1.40	128.0	143.7	2.40
20.2	101.6	4.29	32.0	35.9	1.40	135.6	152.2	1.40
64.0	322.5	10.55	33.9	38.1	1.40	143.7	161.3	1.40
203.2	512.0	15.16	35.9	40.3	1.40	152.2	170.9	1.40
9.0	10.1	0.40	38.1	42.7	1.40	161.3	181.0	3.02
9.5	10.7	0.40	40.3	45.3	1.40	170.9	191.8	3.02
10.1	11.3	0.40	42.7	47.9	1.40	181.0	203.2	3.02
10.7	12.0	0.40	45.3	50.8	1.40	191.8	215.3	3.02
11.3	12.7	0.40	47.9	53.8	1.40	203.2	228.1	2.56
12.0	13.5	0.40	50.8	57.0	3.18	215.3	241.6	2.56
12.7	14.3	0.40	53.8	60.4	3.18	228.1	256.0	2.56
13.5	15.1	0.40	57.0	64.0	3.18	241.6	271.2	2.56
14.3	16.0	0.40	60.4	67.8	3.18	256.0	287.4	2.56
15.1	17.0	0.40	64.0	71.8	3.18	271.2	304.4	2.56
16.0	18.0	0.40	67.8	76.1	3.18	287.4	322.5	2.56
17.0	19.0	0.40	71.8	80.6	1.40	304.4	341.7	2.56
18.0	20.2	0.40	76.1	85.4	1.40	322.5	362.0	2.56
19.0	21.4	0.40	80.6	90.5	1.40	341.7	383.6	2.56
20.2	22.6	0.40	85.4	95.9	1.40	362.0	406.4	2.56
21.4	24.0	0.40	90.5	101.6	1.40	383.6	430.5	2.56
22.6	25.4	0.40	95.9	107.6	1.40	406.4	456.1	2.56
24.0	26.9	0.40	101.6	114.0	1.40	430.5	483.3	2.56
25.4	28.5	0.40	107.6	120.8	2.40	456.1	512.0	2.56

(CCR 00163)

GIRD1110 3.2.1.7.1.3.0-2

The translational accelerations at the spacecraft side of each instrument sensor unit mount **shall** produce an absolute peak acceleration Shock Response Spectra (SRS) less than the limits set in the On Orbit Operational SRS Acceleration Limits Table below. The limits apply to each orthogonal axis for SRS natural frequencies when using a quality factor, Q, of 50. The SRS is computed after the acceleration is high pass filtered with a fourth order Butterworth filter with a -3dB cut off at 1.0 Hz. Use a logarithmic interpolation for both frequency and acceleration terms in the On Orbit Operational SRS Acceleration Limits Table. *(CCR 00163)*

**ID Object 417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Number Requirements Document (GIRD)**

GIRD1110 3.2.1.7.1.3.0-2 **On Orbit Operational SRS Acceleration Limits Table**

f (Hz)	SRS Limit (mg)	SRS Limit/ Q (mg)	f (Hz)	SRS Limit (mg)	SRS Limit/ Q (mg)
10	10.0	0.20	138	45.0	0.90
30	10.0	0.20	165	45.0	0.90
30	30.0	0.60	177	140.7	2.81
52	30.0	0.60	198	140.7	2.81
59	135.2	2.70	210	45.0	0.90
66	135.2	2.70	225	45.0	0.90
73	30.0	0.60	236	103.9	2.08
90	30.0	0.60	264	103.9	2.08
90	45.0	0.90	275	45.0	0.90
112	45.0	0.90	285	45.0	0.90
118	102.3	2.05	295	82.2	1.64
132	102.3	2.05	300	82.2	1.64

(CCR 00163)

GIRD158 3.2.1.7.2 **3.2.1.7.2 Instrument-to-Spacecraft Disturbances**

GIRD159 3.2.1.7.2.1 **3.2.1.7.2.1 Instrument Disturbance Torque Limits**

GIRD160 3.2.1.7.2.1.0-1 At any time during the operational mode of the spacecraft, the sum of the magnitude of the instrument sensor unit's uncompensated torques and the magnitude of its uncompensated linear forces multiplied by a lever arm of 2 meters **shall** not exceed 1.0 N-m.

GIRD161 3.2.1.7.2.2 **3.2.1.7.2.2 Instrument Allowable Angular Momentum**

GIRD162 3.2.1.7.2.2.0-1 The magnitude of the instrument unit's uncompensated angular momentum **shall** not exceed 1.0 N-m-sec.

GIRD163 3.2.1.7.2.2.0-2 The instrument contractor will document the angular momentum produced by the instrument in the IDD.

GIRD164 3.2.1.7.2.3 **3.2.1.7.2.3 Reserved (CCR 01549)**

GIRD166 3.2.1.8 **3.2.1.8 Reserved (CCR 00095)**

GIRD1112 3.2.1.8.0-1 Reserved (CCR 00077) (CCR 00095)

GIRD1113 3.2.1.8.0-2 Reserved (CCR 00077) (CCR 00095)

GIRD1114 3.2.1.8.1 **3.2.1.8.1 Reserved (CCR 00095)**

GIRD1115 3.2.1.8.1.1 **3.2.1.8.1.1 Reserved (CCR 00095)**

GIRD1116 3.2.1.8.1.1.0-1 Reserved (CCR 00077) (CCR 00095)

GIRD1138 3.2.1.8.1.1.0-2 Reserved (CCR 00077)

GIRD1117 3.2.1.8.1.1.0-3 Reserved (CCR 00077)

GIRD1118 3.2.1.8.1.1.0-4 Reserved (CCR 00077) (CCR 00095)

GIRD1142 3.2.1.8.1.1.0-5 Reserved (CCR 00077) (CCR 00095)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1143	3.2.1.8.1.1.0-6	Reserved (<i>CCR 00077</i>) (<i>CCR 00095</i>)
GIRD1144	3.2.1.8.1.1.0-7	Reserved (<i>CCR 00077</i>) (<i>CCR 00095</i>)
GIRD1145	3.2.1.8.1.1.0-8	Reserved (<i>CCR 00077</i>) (<i>CCR 00095</i>)
GIRD1119	3.2.1.8.1.2	3.2.1.8.1.2 Reserved (<i>CCR 00077</i>)
GIRD1120	3.2.1.8.1.2.0-1	Reserved (<i>CCR 00077</i>)
GIRD1121	3.2.1.8.1.3	3.2.1.8.1.3 Reserved (<i>CCR 00095</i>)
GIRD1122	3.2.1.8.1.3.0-1	Reserved (<i>CCR 00095</i>)
GIRD1123	3.2.1.8.1.4	3.2.1.8.1.4 Reserved (<i>CCR 00095</i>)
GIRD1124	3.2.1.8.1.4.0-1	Reserved (<i>CCR 00095</i>)
GIRD1125	3.2.1.8.1.4.0-2	Reserved (<i>CCR 00095</i>)
GIRD1126	3.2.1.8.1.4.0-3	Reserved (<i>CCR 00095</i>)
GIRD1127	3.2.1.8.2	3.2.1.8.2 Reserved (<i>CCR 00095</i>)
GIRD1128	3.2.1.8.2.1	3.2.1.8.2.1 Reserved (<i>CCR 00095</i>)
GIRD1129	3.2.1.8.2.1.0-1	Reserved (<i>CCR 00095</i>)
GIRD1130	3.2.1.8.2.1.0-2	Reserved (<i>CCR 00095</i>)
GIRD1131	3.2.1.8.2.2	3.2.1.8.2.2 Reserved (<i>CCR 00095</i>)
GIRD1132	3.2.1.8.2.2.0-1	Reserved (<i>CCR 00095</i>)
GIRD1133	3.2.1.8.2.2.0-2	Reserved (<i>CCR 00095</i>)
GIRD1111	3.2.1.9	3.2.1.9 Flight and Non-Flight Equipment
GIRD167	3.2.1.9.0-1	The instrument contractor will provide information on all items to be installed or removed prior to flight for identification in the IDD.
GIRD168	3.2.1.9.0-2	The instrument contractor will tag all non-flight items to be removed prior to flight with a red tag stating, " Remove Before Flight ".
GIRD169	3.2.1.9.0-3	The instrument contractor will tag all flight items to be installed prior to flight with a green tag stating, " Install Before Flight ".
GIRD170	3.2.2	3.2.2 Thermal
GIRD171	3.2.2.1	3.2.2.1 Thermal Control Concept
GIRD172	3.2.2.1.0-1	The instrument units installed on the spacecraft bus fall under one of the following categories: <ul style="list-style-type: none"> a) Thermally-independent units are conductively and radiatively decoupled from the spacecraft and reject their heat directly to space. b) Thermally-coupled units dissipate their heat to the spacecraft.

In general:

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD172	3.2.2.1.0-1	<ul style="list-style-type: none"> Instrument <u>electronic units</u> are thermally-coupled. Instrument <u>sensor units</u> are thermally-independent. <p>The instrument contractor will document the thermal control concept in the IDD. (CCR 00250)</p>
GIRD844	3.2.2.1.0-2	The spacecraft shall maintain the instrument units mounting surface temperature within instrument Mission Allowable Temperatures (MAT) during instrument operation.
GIRD845	3.2.2.1.0-3	The spacecraft shall maintain the instrument units mounting surface temperature within non-operational limits when the instrument is non-operating.
GIRD173	3.2.2.1.1	3.2.2.1.1 Independent Thermal Control Design
GIRD1059	3.2.2.1.1.0-1	The instrument contractor is responsible for independent thermal unit thermal design.
GIRD1141	3.2.2.1.1.0-2	Thermally-independent instrument units shall restrict heater power consumption within overall power limitations.
GIRD178	3.2.2.1.2	3.2.2.1.2 Coupled Thermal Control Design
GIRD179	3.2.2.1.2.0-1	The instrument contractor is responsible for thermally coupled unit internal thermal design. For coupled units, the instrument contractor will provide unit internal design information including internal dissipation, couplings, and interface heat flow so the spacecraft contractor can appropriately interface with the unit.
GIRD180	3.2.2.2	3.2.2.2 Heat Transfer
GIRD182	3.2.2.2.0-1	The net heat transfer (conducted and radiated) is the total amount of heat transferred between the instrument units and the spacecraft.
GIRD181	3.2.2.2.1	3.2.2.2.1 Independent Unit - Heat Transfer
GIRD183	3.2.2.2.1.0-1	The net heat transfer between the independent unit and spacecraft includes radiation between adjacent instrument and spacecraft surfaces, conduction via the mechanical interface and conduction via the instrument harness.
GIRD184	3.2.2.2.2	3.2.2.2.2 Independent Unit - Net Heat Transfer
GIRD185	3.2.2.2.2.0-1	For Independent Units, the net heat transfer averaged over the instrument independent unit interface plane area shall be less than 15.5 watts/m ² .
GIRD186	3.2.2.2.3	3.2.2.2.3 Coupled Unit Heat Transfer
GIRD187	3.2.2.2.3.0-1	The spacecraft shall provide a heat rejection path for thermally coupled units.
		Units with less than 5 watts dissipation may rely on radiative rather than conductive heat rejection subject to agreement of the instrument and spacecraft contractors.
		Where conduction is the principal heat transfer mechanism, the interface temperature is the spacecraft side of the mechanical interface.
		For radiatively-coupled units (accommodated within the spacecraft) the interface temperature is the average local environment surrounding unit external surfaces.
GIRD188	3.2.2.2.4	3.2.2.2.4 Coupled Unit - Net Heat Transfer
GIRD189	3.2.2.2.4.0-1	The net heat transfer collectively from the instrument's coupled units to the spacecraft shall not exceed the values dictated by the UIID.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD190	3.2.2.2.5	3.2.2.2.5 Coupled Unit - Heat Transfer Flux Density
GIRD191	3.2.2.2.5.0-1	For conductively-coupled units, peak local heat transfer fluxes conducted to the spacecraft in excess of 0.25 watts per square centimeter shall be coordinated with the spacecraft contractor and subject to NASA concurrence.
GIRD192	3.2.2.2.5.0-2	Where this watt density is exceeded, the spacecraft contractor will provide a detailed description of the heat transport features and SINDA model of the spacecraft side interface.
GIRD193	3.2.2.3	3.2.2.3 Interface Temperatures
GIRD201	3.2.2.3.0-1	For planning and preliminary design purposes, the interface temperature (spacecraft side) for Earth-viewing instruments shall be: <ul style="list-style-type: none"> <li data-bbox="565 653 927 680">a) 0°C to 40°C during operation <li data-bbox="565 684 1000 711">b) -30°C to 50°C during non-operation
GIRD203	3.2.2.4	3.2.2.4 Temperature Monitoring
GIRD204	3.2.2.4.1	3.2.2.4.1 Mechanical Interface Temperature Monitoring
GIRD205	3.2.2.4.1.0-1	The instrument contractor will select a unit attachment point and identify it on the IDD.
GIRD206	3.2.2.4.1.0-2	The spacecraft shall have a temperature sensor adjacent to this attachment point (on the spacecraft side) to serve as the interface temperature sensor.
GIRD207	3.2.2.4.2	3.2.2.4.2 Instrument Critical Temperatures
GIRD208	3.2.2.4.2.0-1	The spacecraft shall convey instrument critical temperatures via the spacecraft telemetry stream.
GIRD209	3.2.2.4.2.0-2	The type(s) of temperature sensor and excitation will be collectively selected by the instrument contractor and spacecraft contractor and is subject to NASA concurrence.
GIRD210	3.2.2.4.2.0-3	The instrument contractor will procure and install the critical temperature sensors.
GIRD211	3.2.2.4.2.0-4	The instrument contractor will furnish temperature calibration coefficients for the critical temperature sensors and document them in the IDD.
GIRD212	3.2.2.4.3	3.2.2.4.3 Instrument Non-Critical Temperatures
GIRD213	3.2.2.4.3.0-1	The instrument shall report instrument non-critical temperatures in telemetry.
GIRD216	3.2.2.5	3.2.2.5 Heater Power and Heater Control
GIRD217	3.2.2.5.0-1	The two categories of instrument heaters are: <ul style="list-style-type: none"> <li data-bbox="472 1587 1000 1614">• Operational heaters controlled by the instrument <li data-bbox="472 1619 1138 1646">• Non-operational (survival) heaters powered by the spacecraft When the instrument is OFF, the instrument survival heaters shall consume no more than 35% of nominal operational power (of the independent units) averaged over every 72 minute period.
GIRD219	3.2.2.6	3.2.2.6 Thermal Interfaces
GIRD220	3.2.2.6.1	3.2.2.6.1 Mounting Details
GIRD221	3.2.2.6.1.0-1	The spacecraft contractor will document in the ICD properties of any thermally conductive or isolating materials used at the interface of the instrument unit. (<i>CCR 00021</i>)


ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD223	3.2.2.6.2	3.2.2.6.2 Contact Area
GIRD224	3.2.2.6.2.0-1	Unit mounting contact area on the instrument and spacecraft shall be unpainted.
GIRD225	3.2.2.6.3	3.2.2.6.3 Interstitial Materials
GIRD226	3.2.2.6.3.0-1	The spacecraft contractor will integrate the instrument units onto the spacecraft including application of any interstitial materials as conductive enhancements. Selection and application of any interface materials require the concurrence of the instrument contractor and spacecraft contractor.
GIRD1079	3.2.2.7	3.2.2.7 Multi-layer Insulation
GIRD1080	3.2.2.7.0-1	Multi-layer insulation (MLI) shall have provisions for electrical grounding to prevent ESD.
GIRD1081	3.2.2.7.0-2	MLI vents shall be located and oriented consistent with observatory contamination requirements.
GIRD227	3.2.3	3.2.3 Instrument Electrical Power
GIRD1171	3.2.3.0-1	All instrument electrical power interface requirements shall be specified at the instrument input power connectors. <i>(CCR 00161B)</i>
GIRD1172	3.2.3.1	3.2.3.1 Electrical Power Interfaces
GIRD230	3.2.3.1.0-1	The spacecraft shall supply functionally independent, redundant operational power buses to each instrument for normal instrument operation. <i>(CCR 00161B)</i>
GIRD1173	3.2.3.1.0-2	The instrument shall utilize only one side of the operational power bus at a time. <i>(CCR 00161B)</i>
GIRD1174	3.2.3.1.0-3	Inadvertent simultaneous application of both primary and redundant Instrument Operational Power by the spacecraft shall not cause damage to the instrument. <i>(CCR 00161B)</i>
GIRD1175	3.2.3.1.0-4	The spacecraft shall supply functionally independent, redundant survival power buses to each instrument to power the instrument survival heaters. <i>(CCR 00161B)</i>
GIRD1176	3.2.3.1.0-5	The instrument shall only utilize survival heater power for heaters and associated passive control circuitry which maintains the instrument at its minimum turn-on temperature. <i>(CCR 00161B)</i>
GIRD1177	3.2.3.1.0-6	Following initial activation both sides of the instrument survival bus shall be powered at all times by the spacecraft. <i>(CCR 00161B)</i>
GIRD1178	3.2.3.1.0-7	The spacecraft power system shall accommodate instrument operational bus turn on and peak survival bus loading simultaneously for each instrument. <i>(CCR 00161B)</i>
GIRD1179	3.2.3.1.0-8	The spacecraft power system shall accommodate the sequential turn on/activation of all instruments in any order from any combination of operating and survival modes. <i>(CCR 00161B)</i>
GIRD1180	3.2.3.1.0-9	Following the initial thermal transition from survival mode following instrument turn-on, the instrument design shall not depend on the use of the survival heater buses when operational power is active. <i>(CCR 00161B)</i>
GIRD1181	3.2.3.2	3.2.3.2 Power Specifications (CCR 00161B)
GIRD1182	3.2.3.2.1	3.2.3.2.1 Power Definitions (CCR 00161B)
GIRD1183	3.2.3.2.1.0-1	The following definitions shall be used when calculating average power, maximum power, and peak current values.

Average Power (Operational) - The total power into an instrument averaged over any 5 minute

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1183	3.2.3.2.1.0-1	<p>period.</p> <p>Average Power (Survival) - The total power into an instrument averaged over any 72 minute period.</p> <p>Maximum Power (Operational or Survival) - The total power into an instrument averaged over any 20ms period.</p> <p>Peak Current (Operational) - The maximum (never to be exceeded) current drawn by the instrument. Peak current is typically calculated as 1.5 times the maximum power at worst case nominal voltage (26 Vdc). (CCR 00161B)</p>
GIRD1184	3.2.3.2.2	3.2.3.2.2 Power Characteristics (CCR 00161B)
GIRD1185	3.2.3.2.2.1	3.2.3.2.2.1 Voltage (CCR 00161B)
GIRD1186	3.2.3.2.2.1.1	3.2.3.2.2.1.1 Instrument Voltage (CCR 00161B)
GIRD242	3.2.3.2.2.1.1.0-1	The spacecraft shall supply a DC voltage at the instrument operational power input connector. (CCR 00161B)
GIRD1187	3.2.3.2.2.1.1.0-2	At any time after the initial turn on of the instrument, the spacecraft shall control the voltage at the instrument operational power input connector to 28 volts \pm 2 volts for any condition of instrument load current (including transients). (CCR 00161B)
GIRD243	3.2.3.2.2.1.1.0-3	The instrument shall operate in accordance with the instrument performance specification within the range of 28 volts Vdc \pm 2 volts at the instrument operational power input connector. (CCR 00161B)
GIRD356	3.2.3.2.2.1.1.0-4	The spacecraft shall supply a steady-state dc voltage of 67.5 Vdc to 71 Vdc at the instrument survival heater power input connector. (CCR 00161B) (CCR 01670)
GIRD357	3.2.3.2.2.1.1.0-5	The instrument shall operate the instrument survival heaters and associated passive control circuitry to maintain minimum turn-on temperatures with a steady-state dc voltage of 67.5 Vdc 71 Vdc applied at the instrument survival heater power input connector. (CCR 00161B) (CCR 01670)
GIRD1188	3.2.3.2.2.1.2	3.2.3.2.2.1.2 Voltage Transients (CCR 00161B)
GIRD1207	3.2.3.2.2.1.2.0-1	The spacecraft shall limit the voltage rate of rise to less than 0.01 V/ μ sec when powering on instrument operational power interfaces. (CCR 00161B)
GIRD1208	3.2.3.2.2.1.2.0-2	During the initial ramp voltage power up of the instrument (0.01 V/ μ sec) the input voltage to the instrument shall not drop more than 0.5 volts. (CCR 00161B)
GIRD265	3.2.3.2.2.1.3	3.2.3.2.2.1.3 Operational Power Voltage Ripple
GIRD266	3.2.3.2.2.1.3.0-1	The spacecraft shall control the instrument operational power voltage ripple to levels that are less than or equal to levels specified in the Instrument Operational Power Voltage Ripple Figure below for all operating modes with all spacecraft power system buses loaded at their maximum steady-state on-orbit load. (CCR 00161B)

ID **Object Number** **417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)**

GIRD266 3.2.3.2.2.1.3.0-1

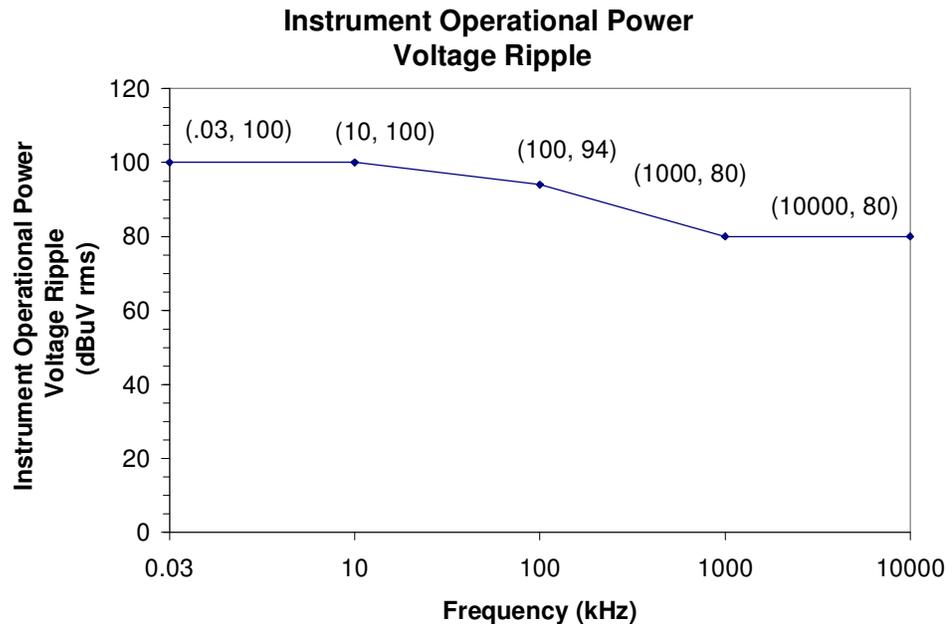


GIRD270	3.2.3.2.2.1.3.0-2	The test equipment used for the voltage ripple test measurements shall comply with sections 4.3.10, 4.3.10.1, 4.3.10.2, and 4.3.10.3.1 of MIL-STD-461 E. <i>(CCR 00161B)</i>
GIRD1189	3.2.3.2.2.1.3.0-3	The voltage ripple test measurements shall comply with the frequency ranges and corresponding bandwidths, dwell times, and minimum measurement times for the analog measurement receiver as defined in section 4.3.10.3.1 of MIL-STD-461 E. <i>(CCR 00161B)</i>
GIRD1190	3.2.3.2.2.1.3.0-4	Emission identification shall be in accordance with section 4.3.10.3.2 of MIL-STD-461 E.. <i>(CCR 00161B)</i>
GIRD1191	3.2.3.2.2.1.3.0-5	The frequency scanning for the voltage ripple measurements shall comply with section 4.3.10.3.3 of MIL-STD-461 E. <i>(CCR 00161B)</i>
GIRD1192	3.2.3.2.2.1.3.0-6	Voltage ripple test measurement data shall be presented in accordance with section 4.3.10.3.4 of MIL-STD-461 E. <i>(CCR 00161B)</i>
GIRD1193	3.2.3.2.2.1.4	3.2.3.2.2.1.4 Abnormal Operation Voltage Limits <i>(CCR 00161B)</i>
GIRD1194	3.2.3.2.2.1.4.0-1	Under abnormal failure mode conditions the spacecraft shall limit the maximum operational power supply voltage to 50 Vdc with maximum durations of 10 ms. <i>(CCR 00161B)</i>
GIRD262	3.2.3.2.2.1.4.0-2	Under abnormal failure mode conditions the spacecraft shall limit the steady state operational power supply voltage to 40 V indefinitely. <i>(CCR 00161B)</i>
GIRD264	3.2.3.2.2.1.4.0-3	The instrument shall survive without damage following exposure to the abnormal operational voltage limits cited in GIRD1194 [3.2.3.2.2.1.4.0-1] and GIRD262 [3.2.3.2.2.1.4.0-2]. <i>(CCR 00161B)</i>
GIRD943	3.2.3.2.2.1.5	3.2.3.2.2.1.5 Voltage Power Source Impedance <i>(CCR 00161B)</i>
GIRD944	3.2.3.2.2.1.5.0-1	The spacecraft shall control its instrument operational power source impedance to the levels specified in the Spacecraft's Instrument Operational Power Source Impedance Figure below.

ID **Object
Number**

**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**

GIRD944 3.2.3.2.2.1.5.0-
1

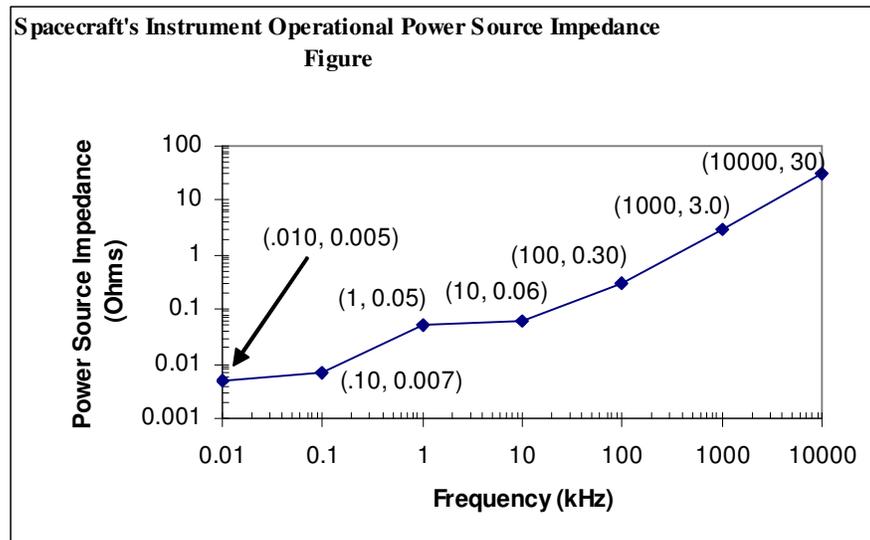

The actual source impedance the instrument will see at the instrument/spacecraft interface will be the source impedance in the figure above modified by the additional impedance of the spacecraft power distribution hardware and the additional impedance of the harness unique to each instrument. These instrument unique spacecraft source impedance values will be documented in the spacecraft to instrument ICDs. (CCR 00161B)

GIRD1195 3.2.3.2.2.1.5.0-
2

The input impedance of the instrument will be coordinated with the spacecraft provider and documented in the spacecraft to instrument ICD. The instrument supplier should consider input filter design, DI/DT requirements, and negative impedance loading of the instrument power conditioning hardware to mitigate potential stability concerns. (CCR 00161B)

GIRD1196 3.2.3.2.2.2 **3.2.3.2.2.2 Current (CCR 00161B)**

GIRD277 3.2.3.2.2.2.1 **3.2.3.2.2.2.1 Operational Power Transients (CCR 00161B)**

GIRD1209 3.2.3.2.2.2.1.0-
1

The amplitude of any instrument operational power current transient **shall** not exceed the peak current value allocated in the UIIDs. (CCR 00161B)

GIRD1197 3.2.3.2.2.2.1.0-
2

The instrument **shall** limit any change in operational power current at any time (including initial power turn-on) to no more than 0.2A/μs. (CCR 00161B)

GIRD1198 3.2.3.2.2.2.1.0-
3

The instrument **shall** control the maximum delta change in operational current at any time to 50% of the peak current allocated in the UIID. (CCR 00161B)

GIRD1199 3.2.3.2.3 **3.2.3.2.3 Power Distribution, Control, and Status (CCR 00161B)**

GIRD232 3.2.3.2.3.1 **3.2.3.2.3.1 Operational Power Lines (CCR 00161B)**

GIRD233 3.2.3.2.3.1.0-1


The spacecraft **shall** supply single fault tolerant operational power distribution to the instrument for primary and redundant instrument operational power sources as specified in the Operational Power Lines Figure below.

ID **Object Number**

417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

GIRD233 3.2.3.2.3.1.0-1

Operational Power Lines Figure

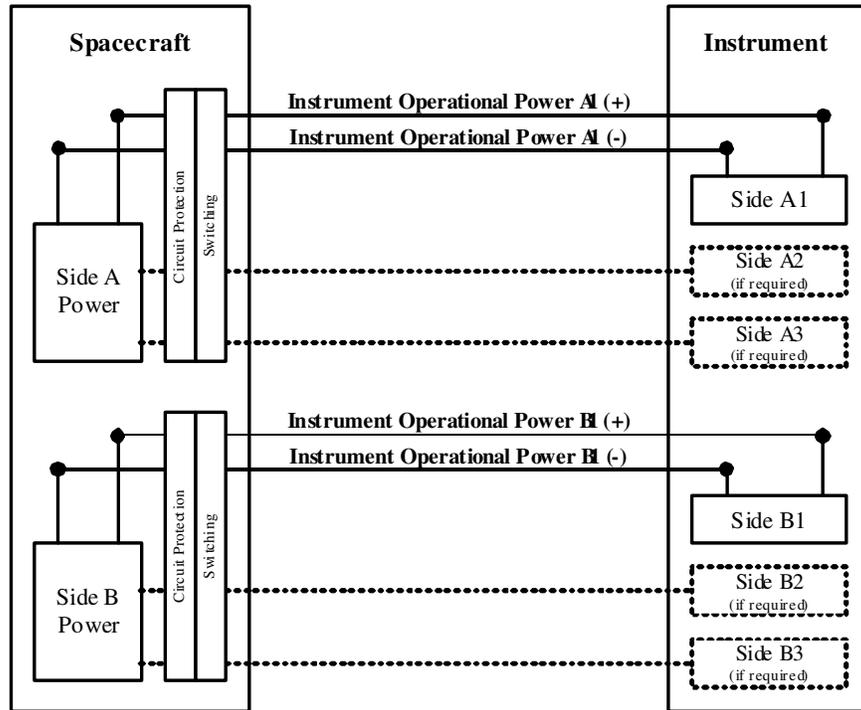


Note: Single-Sided (non-redundant) instruments are required to accommodate both primary and redundant spacecraft operational power at the spacecraft-instrument interface and should provide any associated internal power distribution circuitry required to utilize either spacecraft source. (CCR 00161B)

- GIRD1200 3.2.3.2.3.1.0-2 The spacecraft **shall** provide each instrument with a maximum of three instrument operational power sources. (CCR 00161B)
- GIRD926 3.2.3.2.3.1.0-3 The spacecraft **shall** independently sense and telemeter the instrument operational power current being supplied to each primary instrument operational power source. (CCR 00161B)
- GIRD936 3.2.3.2.3.1.0-4 The spacecraft **shall** independently sense and telemeter the instrument operational power current being supplied to each redundant instrument operational power source. (CCR 00161B)
- GIRD1156 3.2.3.2.3.1.0-5 The spacecraft and instruments **shall** have independent wire harnesses and connectors for the primary and redundant power cables. (CCR 00108)
- GIRD234 3.2.3.2.3.2 **3.2.3.2.3.2 Operational Power On/Off Functionality (CCR 00161B)**
- GIRD235 3.2.3.2.3.2.0-1 The spacecraft **shall** provide redundant commanding to switch instrument operational power on and off to the instrument operational power input connector.
- GIRD236 3.2.3.2.3.2.0-2 The spacecraft **shall** provide redundant instrument operational power on and off status telemetry.
- GIRD237 3.2.3.2.3.2.0-3 The spacecraft **shall** supply redundant switching of instrument operational power to the instrument operational power input connector.
- GIRD238 3.2.3.2.3.2.0-4 The instrument **shall** accept switched power at the instrument operational power input connector.
- GIRD239 3.2.3.2.3.3 **3.2.3.2.3.3 Operational Power Overcurrent Protection (CCR 00161B)**
- GIRD1201 3.2.3.2.3.3.0-1 The spacecraft **shall** provide protection of the spacecraft power system by providing overcurrent protection on each instrument operational power connection. (CCR 00161B)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1202	3.2.3.2.3.3.0-2	The size of the spacecraft provided operational power overcurrent devices for each instrument shall be documented in the ICD. (CCR 00161B)
GIRD240	3.2.3.2.3.3.0-3	Operational Power harness wire sizes shall be consistent with overcurrent protection device sizes. (CCR 00161B)
GIRD345	3.2.3.2.3.4	3.2.3.2.3.4 Survival Heater Power Lines (CCR 00161B)
GIRD346	3.2.3.2.3.4.0-1	The spacecraft shall supply single fault tolerant survival heater power distribution to the instrument for primary and redundant instrument survival heater power sources as specified in the Survival Heater Power Lines Figure below.

Survival Heater Power Lines Figure

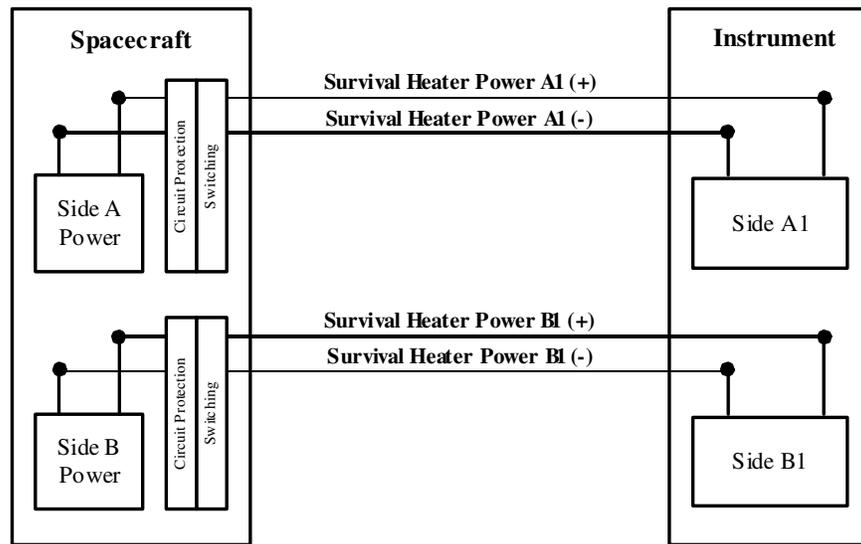

(CCR 00161B)

GIRD1203	3.2.3.2.3.4.0-2	The spacecraft shall independently sense and telemeter the instrument survival heater power current being supplied to each primary survival heater power source. (CCR 00161B)
GIRD1204	3.2.3.2.3.4.0-3	The spacecraft shall independently sense and telemeter the instrument survival heater power current being supplied to each redundant instrument survival heater power source. (CCR 00161B)
GIRD348	3.2.3.2.3.5	3.2.3.2.3.5 Survival Heater Power On/Off Functionality (CCR 00161B)
GIRD349	3.2.3.2.3.5.0-1	The spacecraft shall provide redundant commanding to switch instrument survival heater power on and off to the instrument survival heater power input connector. (CCR 00161B)
GIRD350	3.2.3.2.3.5.0-2	The spacecraft shall provide redundant instrument survival heater power on and off status telemetry. (CCR 00161B)
GIRD351	3.2.3.2.3.5.0-3	The spacecraft shall supply redundant switching of instrument survival heater power to the instrument survival heater power input connector.
GIRD352	3.2.3.2.3.5.0-4	The instrument shall accept switched power at the instrument survival heater power input connector.
GIRD353	3.2.3.2.3.6	3.2.3.2.3.6 Survival Heater Power Overcurrent Protection (CCR 00161B)
GIRD1205	3.2.3.2.3.6.0-1	The spacecraft shall provide protection of the spacecraft power system by providing overcurrent protection on each instrument survival heater power connection. (CCR 00161B)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1206	3.2.3.2.3.6.0-2	The size of the spacecraft provided survival heater power overcurrent devices for each instrument shall be documented in the ICD. <i>(CCR 00161B)</i>
GIRD354	3.2.3.2.3.6.0-3	Survival Heater Power harness wire sizes shall be consistent with overcurrent protection device sizes. <i>(CCR 00161B)</i> .
GIRD1225	3.2.3.2.3.7	3.2.3.2.3.7 Abnormal Survival Power Voltage Limits <i>(CCR 01670)</i>
GIRD1223	3.2.3.2.3.7.0-1	Under failure mode conditions the spacecraft shall limit the instrument survival power voltage to 74.0 V during integration and test phase. <i>(CCR 01670)</i>
GIRD1224	3.2.3.2.3.7.0-2	Under worst case fault transient conditions the spacecraft shall limit the instrument survival power minimum voltage to 30V for maximum duration of 50 msec and up to maximum voltage of 80 V for maximum duration of 50 msec. <i>(CCR 01670)</i>
GIRD400	3.2.4	3.2.4 Instrument Electrical Power Grounding
GIRD401	3.2.4.1	3.2.4.1 Instrument Operational Power Grounding


ID **Object Number**

417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

GIRD402 3.2.4.1.0-1

The instrument electrical power grounding **shall** be in accordance with the Electrical Grounding Figure.

Electrical Grounding Figure

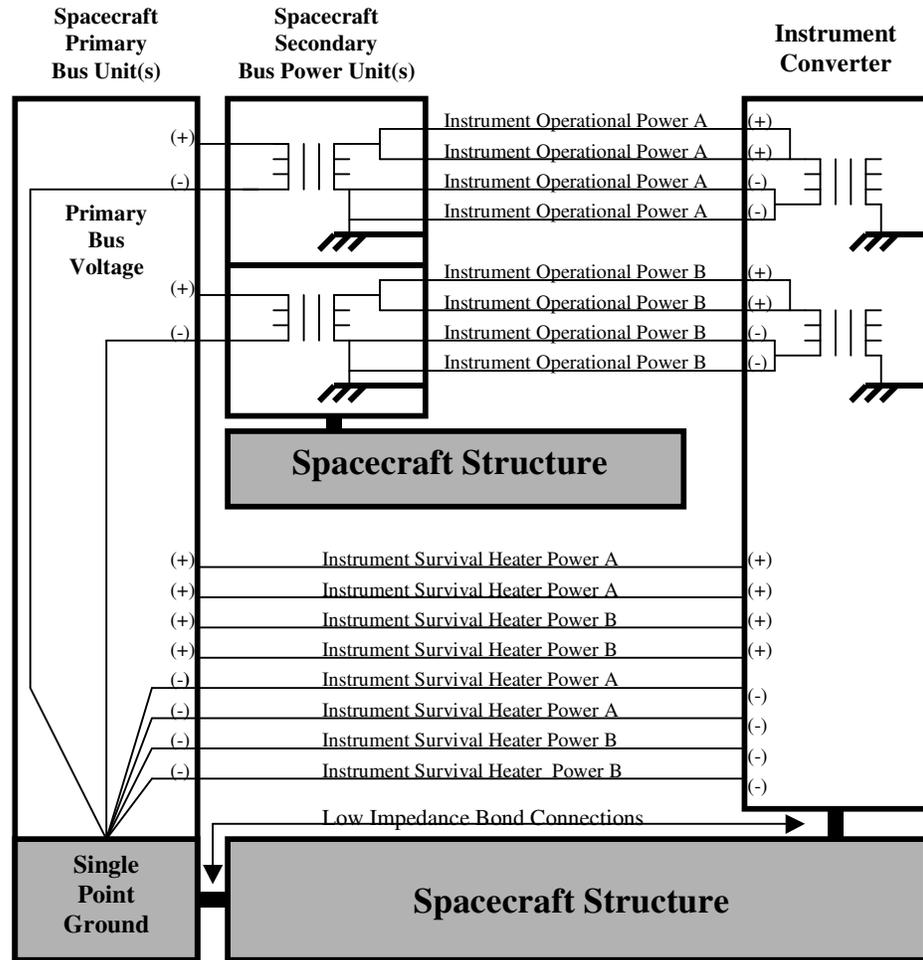

GIRD403 3.2.4.1.0-2

The spacecraft **shall** connect each instrument operational power return to the chassis of the spacecraft secondary bus power unit.

GIRD947 3.2.4.1.0-3

The spacecraft **shall** connect the spacecraft primary bus return(s) to the spacecraft single point ground.

GIRD1058 3.2.4.1.0-4

The spacecraft **shall** control the dc resistance of each primary bus return connection to the single point ground to less than 2.5 milliohms. (CCR 00008A)

GIRD404 3.2.4.1.0-5

The spacecraft **shall** control the dc resistance between the spacecraft’s instrument operational power return at the spacecraft’s secondary power bus unit connector and the spacecraft secondary bus power unit chassis to less than 2.5 milliohms. (CCR 00008A)

GIRD972 3.2.4.1.0-6

The spacecraft **shall** supply a low impedance bond connection with a dc resistance of less than 2.5 milliohms between the spacecraft secondary power unit chassis and the spacecraft structure. (CCR 00008A)


ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD405	3.2.4.1.0-7	The instrument shall isolate the instrument operational power returns from the instrument chassis with a dc resistance greater than 1 megohm.
GIRD410	3.2.4.2	3.2.4.2 Instrument Survival Heater Power Grounding
GIRD411	3.2.4.2.0-1	The spacecraft shall connect each instrument survival heater power return at spacecraft's primary bus unit connector to the spacecraft's primary bus return with a dc resistance of less than 2.5 milliohms. (CCR 00008A)
GIRD412	3.2.4.2.0-2	Reserved (CCR 00008A)
GIRD948	3.2.4.2.0-3	The spacecraft shall supply a low impedance bond connection with a dc resistance of less than 2.5 milliohms between the single point ground and the spacecraft structure. (CCR 00008A)
GIRD413	3.2.4.2.0-4	The instrument shall isolate the instrument survival heater power returns from the instrument chassis with a dc resistance greater than 1 megohm.
GIRD414	3.2.4.3	3.2.4.3 Instrument Secondary Power Grounding
GIRD415	3.2.4.3.0-1	The instrument shall isolate the instrument secondary power returns from the instrument operational power and instrument survival heater power returns with a dc resistance greater than 1 megohm.
GIRD416	3.2.4.3.0-2	The spacecraft shall supply a low impedance bond connection with a dc resistance of less than 2.5 milliohm between the spacecraft structure and instrument chassis mounted directly to the spacecraft structure.
GIRD417	3.2.4.3.0-3	The spacecraft shall supply a low impedance electrical connection with a dc resistance of less than 25 milliohms between the spacecraft structure and instrument chassis mounted on other surfaces than the spacecraft structure. Examples of mounting surfaces other than the spacecraft structure are the solar array yoke and an optical bench. (CCR 00008A)
GIRD949	3.2.4.4	3.2.4.4 Instrument Electrical Signal Grounding
GIRD950	3.2.4.4.1	3.2.4.4.1 Instrument Command Grounding
GIRD951	3.2.4.4.1.1	3.2.4.4.1.1 Instrument Pulse Command Grounding
GIRD952	3.2.4.4.1.1.0-1	The instrument shall isolate the instrument pulse command returns from the instrument operational power returns, instrument survival heater power returns, instrument secondary power returns and instrument serial command returns with a dc resistance greater than 1 megohm.
GIRD954	3.2.4.4.1.2	3.2.4.4.1.2 Instrument Serial Command Grounding
GIRD955	3.2.4.4.1.2.0-1	The instrument shall isolate the instrument serial command returns in accordance with the <u>European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard.</u>
GIRD956	3.2.4.4.1.3	3.2.4.4.1.3 Instrument Electro-Explosive Device (EED) Command Grounding
GIRD957	3.2.4.4.1.3.0-1	The instrument shall isolate the instrument EED command returns from the instrument pulse command returns, instrument serial command returns, and instrument secondary power returns with a dc resistance greater than 1 megohm.
GIRD958	3.2.4.4.2	3.2.4.4.2 Instrument Telemetry Grounding
GIRD959	3.2.4.4.2.1	3.2.4.4.2.1 Instrument Analog Telemetry Grounding

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD960	3.2.4.4.2.1.0-1	The instrument shall isolate low frequency analog telemetry returns with signal frequency characteristics below 1 MHz from the instrument operational power returns, instrument survival heater power returns, instrument pulse command returns, instrument serial command returns, instrument EED command returns, and serial telemetry returns with a dc resistance greater than 1 megohm.
GIRD961	3.2.4.4.2.2	3.2.4.4.2.2 Instrument Serial Telemetry Grounding
GIRD962	3.2.4.4.2.2.0-1	The instrument shall isolate the serial telemetry returns in accordance with the <u>European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard.</u>
GIRD963	3.2.4.5	3.2.4.5 Instrument Electrical Accommodations
GIRD964	3.2.4.5.1	3.2.4.5.1 Spacecraft/Instrument Interface Harnessing
GIRD965	3.2.4.5.1.0-1	The spacecraft shall supply the required flight harnesses between the instrument and spacecraft. The harness is considered to include the required harness interface connectors, harness wire, harness shielding, insulation wrap, fixing plates, grommets, edge protectors, connector savers, and thermal insulation to make a reliable electrical connection for the entire mission life.
GIRD967	3.2.4.5.2	3.2.4.5.2 Spacecraft/Instrument Power Interface Harnessing
GIRD968	3.2.4.5.2.0-1	Reserved (<i>CCR 00041A</i>)
GIRD969	3.2.4.5.3	3.2.4.5.3 Spacecraft/Instrument Telemetry & Command Interface Harnessing
GIRD970	3.2.4.5.3.0-1	The spacecraft shall construct spacecraft/instrument telemetry & command interface harnesses which comply with the <u>European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard.</u>
GIRD971	3.2.4.5.3.0-2	The instrument shall supply the mating connectors to the spacecraft/instrument telemetry & command interface harnesses which comply with the <u>European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard.</u>
GIRD1157	3.2.4.5.3.0-3	The spacecraft and instrument shall have independent wire harnesses and connectors for the primary and redundant critical telemetry, discrete, and monitor signal wires. (<i>CCR 00108</i>)
GIRD421	3.2.5	3.2.5 Command and Data Handling
GIRD422	3.2.5.1	3.2.5.1 Data Transfer Between the Instrument and Spacecraft
GIRD423	3.2.5.1.0-1	All data transferred between the instrument and spacecraft shall use the <u>European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard.</u>
GIRD424	3.2.5.2	3.2.5.2 SpaceWire Layer Support
GIRD425	3.2.5.2.0-1	All data transferred between the instrument and the spacecraft shall use the <u>European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard</u> through the packet layer as a minimum.
GIRD932	3.2.5.2.1	3.2.5.2.1 Guaranteed Delivery
GIRD933	3.2.5.2.1.0-1	All data transferred between the instrument and the spacecraft shall provide guaranteed data delivery as defined in <u>GOES R Reliable Data Delivery Protocol</u> document. (<i>CCR 00109</i>)
GIRD426	3.2.5.3	3.2.5.3 SpaceWire Data Bus
GIRD427	3.2.5.3.0-1	The SpaceWire Data Bus shall be a point-to point communications path.

ID Object Number 417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

GIRD977 3.2.5.3.1 **3.2.5.3.1 SpaceWire Redundancy**

GIRD978 3.2.5.3.1.0-1 The SpaceWire bus **shall** be dual redundant cross-strapped between the instrument and spacecraft as shown in the illustration below.

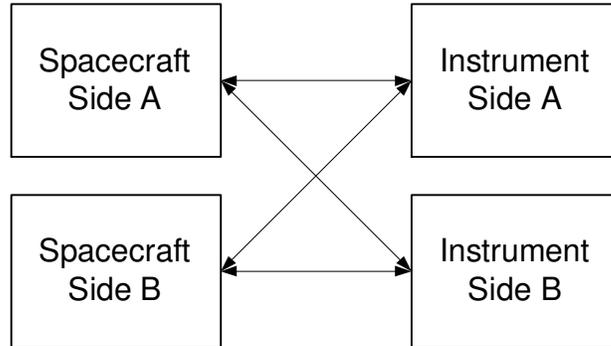

GIRD428 3.2.5.4 **3.2.5.4 Source Packet Format**

GIRD429 3.2.5.4.0-1 All data transferred over the SpaceWire **shall** use the CCSDS 133.0-B-1 Section 4.1 Protocol Data Unit definition shown in the Source Packet Definition Figure. (CCR 00158)

Source Packet Definition Figure

PRIMARY HEADER							SECONDARY HEADER	DATA VARIABLE
PACKET IDENTIFICATION				PACKET SEQUENCE CONTROL				
VERSION NUMBER	TYPE	SEC. HDR FLAG	APPLICATION PROCESS ID	SEQUENCE FLAGS	PACKET SEQUENCE COUNT	PACKET LENGTH	TIME CODE AND ANCILLARY DATA	
3 bits	1 bit	1 bit	11 bits	2 bits	14 bits	16 bits	104 bits	
							13 – 8K octets	

GIRD430 3.2.5.4.1 **3.2.5.4.1 Source Packet Length**

GIRD431 3.2.5.4.1.0-1 Source packets **shall** be variable length with a maximum data zone of 8192 octets including Secondary Header.

GIRD432 3.2.5.4.2 **3.2.5.4.2 Secondary Header Flag**


GIRD433 3.2.5.4.2.0-1 The Secondary Header Flag **shall** be set to the value 1. (CCR 00372)

GIRD434 3.2.5.4.3 **3.2.5.4.3 Source Packet Secondary Header**

**ID Object 417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Number Requirements Document (GIRD)**

GIRD435 3.2.5.4.3.0-1 The Source Packet Secondary Header **shall** be as defined in the Secondary Header Figure.

Secondary Header Figure

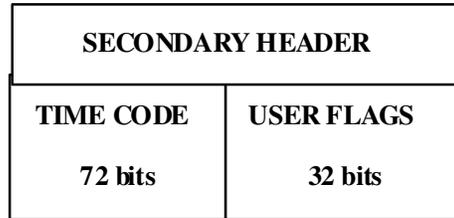

GIRD436 3.2.5.4.4 **3.2.5.4.4 Sequence Flags**

GIRD437 3.2.5.4.4.0-1 The Sequence Flags **shall** be set to the value of 11.
Note: Segmentation services are not permitted.

GIRD438 3.2.5.4.5 **3.2.5.4.5 User Defined Flags**

GIRD439 3.2.5.4.5.0-1 The instrument contractor will define Secondary Header User-Defined Flags in the ICD.

GIRD440 3.2.5.5 **3.2.5.5 SpaceWire Data Rate**

GIRD441 3.2.5.5.0-1 Data transferred over the SpaceWire data bus **shall** be clocked at 132Mhz. (*CCR 00229*)

Note: This clock rate allows for a 106Mbps data rate accounting for SpaceWire overhead. (*CCR 00229*)

GIRD442 3.2.5.6 **3.2.5.6 Instrument to Spacecraft Data Volume**

GIRD443 3.2.5.6.0-1 The volume of instrument data transmitted to the spacecraft **shall** not exceed the values allocated by the UIID.

GIRD444 3.2.5.7 **3.2.5.7 Pulse Per Second (PPS)**

GIRD445 3.2.5.7.0-1 The spacecraft **shall** provide the instrument a 1 PPS time code sequence accurate to ± 10 microseconds relative to UTC.

GIRD446 3.2.5.7.1 **3.2.5.7.1 SpaceWire Time Code Support**

GIRD447 3.2.5.7.1.0-1 The 1 PPS time code sequence **shall** comply with the European Cooperation For Space Standardization (ECSS) ECSS-E50-12A (Space Wire) standard.

GIRD448 3.2.5.7.2 **3.2.5.7.2 PPS Signal Drift**

GIRD449 3.2.5.7.2.0-1 The 1 PPS signal **shall** not drift more than $\pm 1\mu\text{sec}$ over 100 seconds.

GIRD450 3.2.5.7.3 **3.2.5.7.3 Time Message**

GIRD451 3.2.5.7.3.0-1 The spacecraft **shall** transmit a source packet containing the time code to be synchronized by the 1 PPS sequence.

GIRD1221 3.2.5.7.3.0-2 The spacecraft time message packet **shall** comply with the Spacecraft Time Message Packet Figure.

**ID Object
 Number**

**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**

GIRD1221 3.2.5.7.3.0-2

Spacecraft Time Message Packet Figure

PRIMARY HEADER							SECONDARY HEADER	
PACKET IDENTIFICATION				PACKET SEQUENCE CONTROL				
VERSION NUMBER	TYPE	SEC. HDR FLAG	APPLICATION PROCESS ID	SEQUENCE FLAGS	PACKET SEQUENCE COUNT	PACKET LENGTH	TIME CODE	SPARE
"0"d	"1"b	"1"b	"1"d	"11"b		"9" d		
3 bits	1 bit	1 bit	11 bits	2 bits	14 bits	16 bits	72 bits	8 bits

Note: The Secondary Header includes 72 bits of time code as defined in GIRD 453 plus 8 bits of spare.
(CCR 01497)


GIRD452 3.2.5.7.4

3.2.5.7.4 Time Code Format

GIRD453 3.2.5.7.4.0-1

The time code **shall** comply with the CCSDS 301.B-3 Time Code Formats, Day Segmented format in the Time Code Format Figure.

Time Code Format Figure

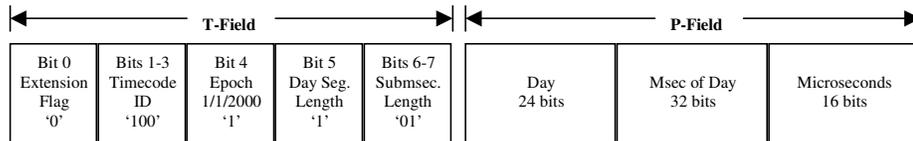

Note: The T-Field is implied and not included in the actual time message.

GIRD454 3.2.5.7.5

3.2.5.7.5 Epoch

GIRD455 3.2.5.7.5.0-1

The time code epoch **shall** be 12:00, January 1, 2000 UTC. (CCR 01241)

GIRD456 3.2.5.7.6

3.2.5.7.6 Distribution Timing

GIRD457 3.2.5.7.6.0-1

The time message **shall** be issued between 500 ms and 800 ms before reception of the SpaceWire time code sequence.

GIRD458 3.2.5.8

3.2.5.8 Ancillary Data

GIRD459 3.2.5.8.0-1

The spacecraft **shall** provide the instruments an ancillary data packet defined in the ICD.

GIRD460 3.2.5.8.1

3.2.5.8.1 Ancillary Packet Rate

GIRD461 3.2.5.8.1.0-1

The Ancillary Packet **shall** be transmitted at 100 packets per second.

GIRD462 3.2.5.9

3.2.5.9 Control and Monitoring

GIRD463 3.2.5.9.0-1

The spacecraft **shall** provide remote access to all critical telemetry and control. (CCR 00096A)

Critical telemetry is defined as telemetry points that are required to monitor the instrument in powered off state.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD463	3.2.5.9.0-1	<p>Non-critical telemetry is defined as telemetry points that are required to monitor the instrument in powered on state.</p> <p>Engineering telemetry are data required to process instrument sensor data to higher level products.</p> <p>Housekeeping telemetry are data required to monitor instrument operation, health, and safety.</p>
GIRD464	3.2.5.9.1	3.2.5.9.1 Critical Telemetry
GIRD465	3.2.5.9.1.0-1	All temperature and status telemetry required to monitor the health of the instrument will be defined in the ICD.
GIRD469	3.2.5.9.2	3.2.5.9.2 Critical Telemetry Analog Signals
GIRD470	3.2.5.9.2.0-1	The spacecraft shall provide up to 16 analog signals to monitor critical temperature points to each instrument.
GIRD471	3.2.5.9.3	3.2.5.9.3 Critical Telemetry Analog Signal Resolution
GIRD472	3.2.5.9.3.0-1	The Critical Telemetry Analog signal resolution shall be 12 bits \pm 0.5 LSB.
GIRD473	3.2.5.9.4	3.2.5.9.4 Discrete Control Signals
GIRD474	3.2.5.9.4.0-1	The spacecraft shall provide up to 16 discrete pulse or level control signals to the instrument. Note: The actual combination of control signals will be documented in the IDD. (<i>CCR 00165</i>)
GIRD475	3.2.5.9.5	3.2.5.9.5 Discrete Monitor Signals
GIRD920	3.2.5.9.5.0-1	The spacecraft shall provide up to 16 discrete instrument monitor lines to each instrument.
GIRD981	3.2.5.9.6	3.2.5.9.6 Critical Telemetry Signal Characteristics
GIRD982	3.2.5.9.6.0-1	Critical telemetry sensors shall be sourced, from the spacecraft a current from 0.1 to 10ma programmable in 0.1ma steps.
GIRD983	3.2.5.9.7	3.2.5.9.7 Discrete Pulse Control Signal Characteristics (<i>CCR 00165</i>)
GIRD984	3.2.5.9.7.0-1	The spacecraft provided discrete pulse command ON signal shall source 500ma maximum at 28V +/- 3V with 150 msec +/- 50 msec pulse widths. (<i>CCR 00165</i>)
GIRD1167	3.2.5.9.8	3.2.5.9.8 Discrete Level Control Signal Definition (<i>CCR 00165</i>)
GIRD1166	3.2.5.9.8.0-1	The spacecraft provided level control signal shall consider 0 Volts as an OFF condition and +28 Volts +/- 3 Volts as an ON condition. (<i>CCR 00165</i>)
GIRD985	3.2.5.9.9	3.2.5.9.9 Discrete Monitor Signal Sink Current
GIRD986	3.2.5.9.9.0-1	Discrete telemetry points monitored by the spacecraft shall sink 1ma +/-1%.
GIRD987	3.2.5.9.10	3.2.5.9.10 Discrete Monitor ON Status
GIRD988	3.2.5.9.10.0-1	A Telemetry Discrete Monitor point with a current of 0.8ma or greater shall be considered in the ON state.
GIRD989	3.2.5.9.11	3.2.5.9.11 Discrete Monitor OFF Status

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD990	3.2.5.9.11.0-1	A Telemetry Discrete Monitor point with a current of 0.2ma or less shall be considered in the OFF state.
GIRD491	3.2.5.9.12	3.2.5.9.12 Instrument Configuration Commands
GIRD492	3.2.5.9.12.0-1	The instrument shall be configurable by spacecraft issued commands. Note: The instrument may also internally configure itself, reporting its configuration via telemetry.
GIRD493	3.2.5.9.12.1	3.2.5.9.12.1 Configuration Command Definition
GIRD494	3.2.5.9.12.1.0-1	The instrument contractor will document instrument configuration commands in the IDD.
GIRD979	3.2.5.9.13	3.2.5.9.13 Stored Command Processing
GIRD980	3.2.5.9.13.0-1	All stored command processing services shall be provided by the spacecraft.
GIRD558	3.2.6	3.2.6 Environmental Conditions
GIRD559	3.2.6.1	3.2.6.1 On-Orbit Radiation Environment
GIRD935	3.2.6.1.0-1	The instruments and spacecraft shall comply with the on-orbit radiation requirements that are described in the GSFC document <u>417-R-RPT-0027 titled "The Radiation Environment for Electronic Devices on the GOES-R Series Satellites."</u> (CCR 00096A)
GIRD576	3.2.6.2	3.2.6.2 Launch Environment
GIRD577	3.2.6.2.0-1	The instruments and spacecraft shall be designed to meet the launch environment described herein. The baseline launch vehicle is planned to be an expendable Delta IV or Atlas V. (CCR 00096A)
GIRD578	3.2.6.2.1	3.2.6.2.1 Thermal Environment During Launch
GIRD580	3.2.6.2.1.0-1	The fairing inner surface temperatures shall not exceed 150°C for 300 (TBR) seconds.
GIRD581	3.2.6.2.1.0-2	The fairing inner surface shall radiate to the instrument no more than 1240 W/m ² to the instrument for 300 seconds.
GIRD582	3.2.6.2.1.0-3	The instantaneous free molecular heating on instrument surfaces in the velocity vector at the time of fairing separation shall not exceed 1135 W/m ² , 3 sigma.
GIRD583	3.2.6.2.1.0-4	The duration of free molecular heating shall be limited to 20 (TBR) seconds after fairing separation.
GIRD584	3.2.6.2.2	3.2.6.2.2 Pressure Profile
GIRD585	3.2.6.2.2.0-1	The spacecraft contractor will document in the ICD the predicted launch pressure decay time history obtained from the launch vehicle contractor. Inside the launch vehicle fairing, the pressure decays from a maximum of 110 kPa to an orbital minimum of 13 nPa over a period of 100 seconds.
GIRD586	3.2.6.2.2.0-2	The depressurization rate shall be less than 2.8 kPa/sec except for a maximum 5 second excursion to 6.2 kPa/sec.
GIRD587	3.2.6.2.3	3.2.6.2.3 Flight Acceleration

ID Object Number 417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

GIRD588 3.2.6.2.3.0-1 Flight limit loads for each instrument unit **shall** be defined by the spacecraft contractor and recorded in the ICD.


GIRD589 3.2.6.2.3.0-2 The instrument unit interface forces **shall** not exceed those induced by a static acceleration load factor times 9.81 m/s/s in any direction. The acceleration load factor is defined as a logarithmic scale linear interpolation of the values in the Mass Acceleration Curve Table with an absolute limit of 55 g's. The Mass Acceleration Curve Table is plotted in the Mass Acceleration Curve Figure. (CCR 00081A)

Mass Acceleration Curve Table

Mass (kg)	Load (G)
≤ 2.5	55
98	12
500	12

(CCR 00081A) (CCR 00196)

Mass Acceleration Curve Figure (CCR 00196)

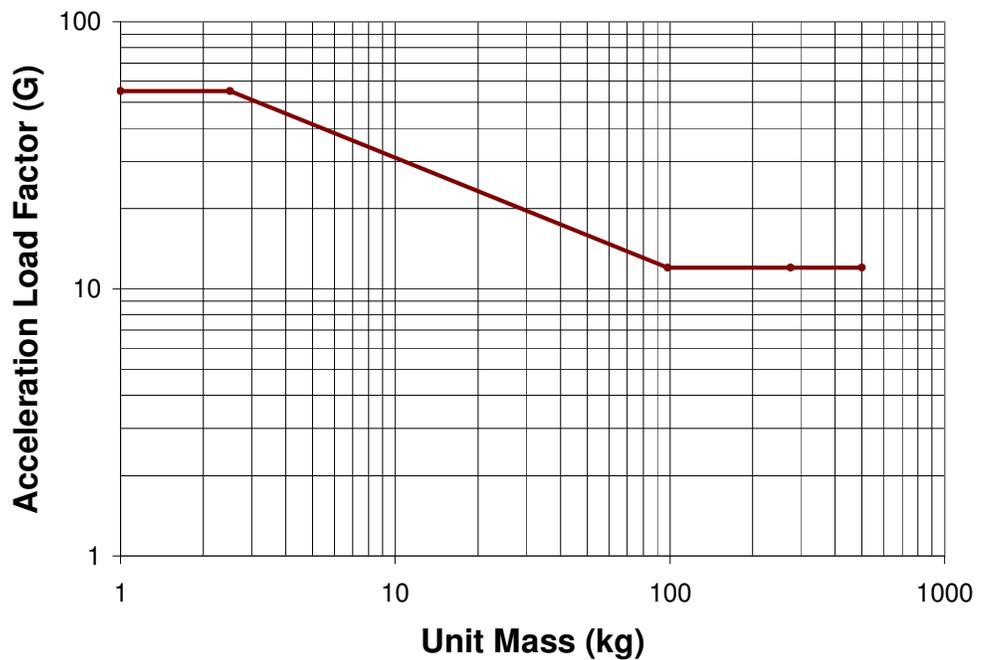

(CCR 00196)


GIRD590 3.2.6.2.3.0-3 The quasi-static acceleration limit loads for the center of mass of the spacecraft will not exceed the limits plotted in Quasi-Static Spacecraft Center of Mass Limit Loads Figure.

ID **Object
Number**

**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**

GIRD590 3.2.6.2.3.0-3

Quasi-Static Spacecraft Center of Mass Limit Loads Figure

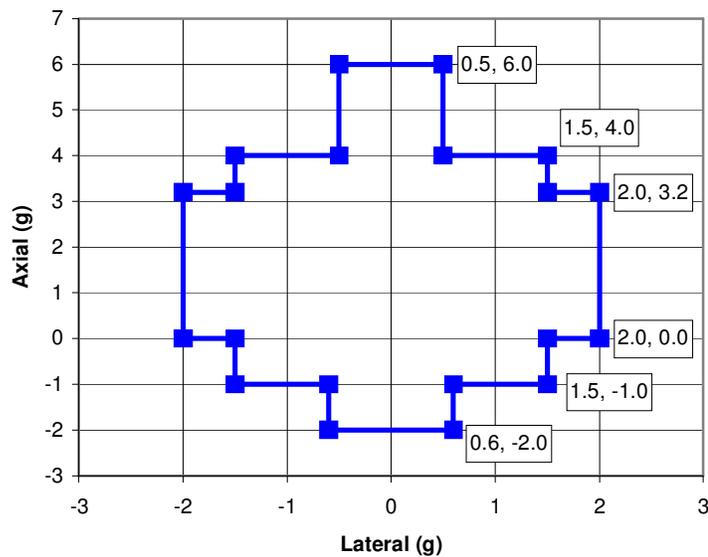

(CCR 01051)

GIRD591 3.2.6.2.4

3.2.6.2.4 Flight Random Vibration

GIRD592 3.2.6.2.4.0-1

Based on the structural vibrations produced by the vibration and acoustic launch environments, the spacecraft contractor will document in the ICD measured or predicted maximum expected flight level random vibration environments for each of the instrument units. Flight levels are equivalent to acceptance levels.

GIRD874 3.2.6.2.4.0-2

The ASD levels **shall** not exceed the limits set in **GIRD588** and **GIRD589** Flight Acceleration.

GIRD593 3.2.6.2.4.0-3

The maximum expected flight random vibration Acceleration Spectral Density (ASD) for each instrument unit with a mass less than 22.7 kg **shall** not exceed the limit levels shown in the Flight Limit Acceleration Spectral Densities (ADS) figure in **GIRD596**.

GIRD594 3.2.6.2.4.0-4

For each instrument unit with a mass greater than 22.7 kg and less than 59 kg, the limit ASD levels **shall** be reduced by a factor of 22.7 kg divided by the mass of the unit in kilograms while maintaining the slope magnitudes at 6 dB per octave.

GIRD595 3.2.6.2.4.0-5

For each instrument unit with a mass greater than 59 kg and less than 182 kg, the limit ASD levels for the 50 to 800 Hz band **shall** be reduced by a factor of 22.7 kg divided by the mass of the unit in kilograms while maintaining the 20 and 2000 Hz levels at 0.005 g²/Hz.

GIRD596 3.2.6.2.4.0-6

For each instrument unit with a mass greater than 182 kg, the flight ASD levels **shall** not exceed the limit ASD levels for a 182 kg unit.

The Flight Limit Acceleration Spectral Densities (ASD) Figure plots the limit acceleration spectral densities for units with a mass of 22.7, 59 and 182 kg.

ID **Object
Number**


**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**

GIRD596 3.2.6.2.4.0-6

Flight Random Vibration Table

Frequency (Hz)	Units	Component Mass		
	kg	22.7	59	182
20	g^2/Hz	0.013	0.005	0.005
20-50	dB/oct	+6.0	+6.0	+2.3
50-800	g^2/Hz	0.080	0.031	0.010
800-2000	dB/oct	-6.0	-6.0	-2.3
2000	g^2/Hz	0.013	0.005	0.005
Overall	g rms	10.0	6.2	4.0

Flight Limit Acceleration Spectral Densities (ASD) Figure

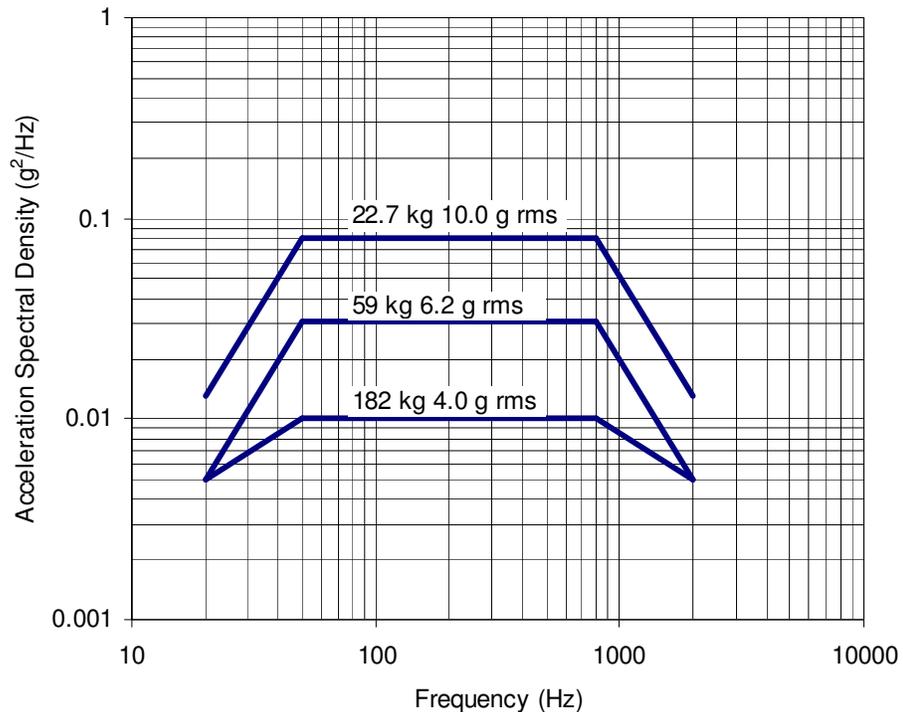

GIRD597 3.2.6.2.5

3.2.6.2.5 Flight Sinusoidal Vibration

GIRD598 3.2.6.2.5.0-1

Based on the structural response of the spacecraft produced by the maximum expected launch vehicle interface sinusoidal acceleration, the spacecraft contractor will document in the ICD the predicted maximum sinusoidal acceleration response at the interfaces for each of the instrument units.

GIRD599 3.2.6.2.5.0-2


The maximum flight sinusoidal acceleration limit loads at the interfaces for each of the instrument units **shall** not exceed the limits in the Flight Limit Instrument Unit Sinusoidal Accelerations Figure and the limits set in GIRD588 and GIRD589 Flight Acceleration.

ID **Object
Number**

**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**

GIRD599 3.2.6.2.5.0-2


Flight Limit Instrument Unit Sinusoidal Accelerations Figure (CCR 00023)

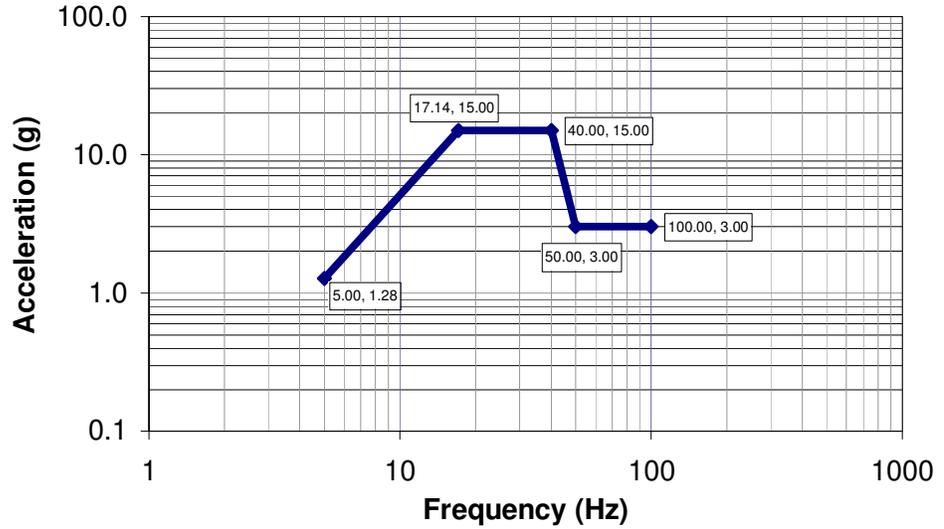

GIRD600 3.2.6.2.5.0-3

The maximum flight sinusoidal acceleration limit loads at the interface between the spacecraft and the launch vehicle **shall** not exceed the limits plotted in Limit Spacecraft to Launch Vehicle Sinusoidal Accelerations Figure.

Limit Spacecraft to Launch Vehicle Sinusoidal Accelerations Figure

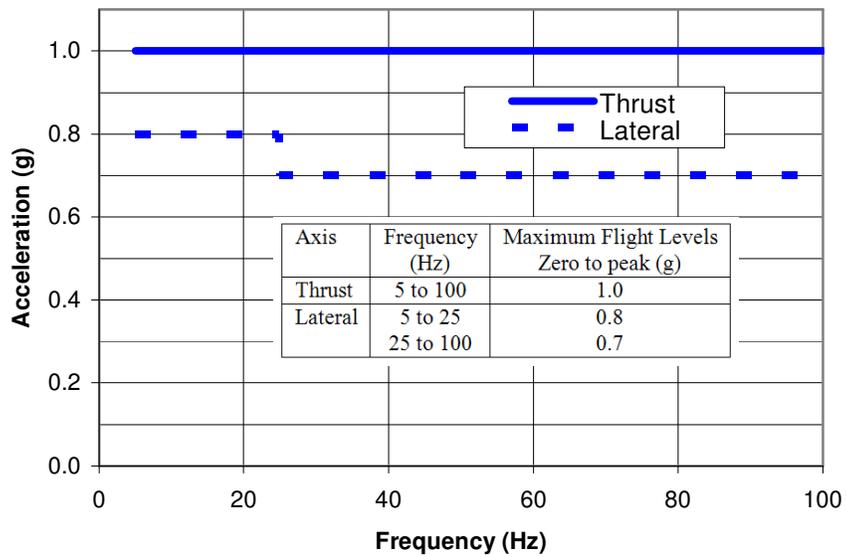

(CCR 01051)

GIRD601 3.2.6.2.6


3.2.6.2.6 Shock

ID Object Number 417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

- GIRD602 3.2.6.2.6.0-1 Based on launch vehicle and spacecraft shock inputs transmitted through spacecraft structure, the spacecraft contractor will document in the ICD the expected shock levels at the interfaces of the instrument units.

- GIRD885 3.2.6.2.6.0-2 For each instrument unit and for each axis, the flight shock accelerations on the spacecraft side of the instrument to spacecraft interface **shall** produce a peak acceleration response spectra less than the limits set in the Flight Shock Limit Acceleration Response Spectra from the Spacecraft to Instrument Unit Figure when using a quality factor, Q, of 10.

Flight Shock Limit Acceleration Response Spectra from the Spacecraft to Instrument Unit Figure

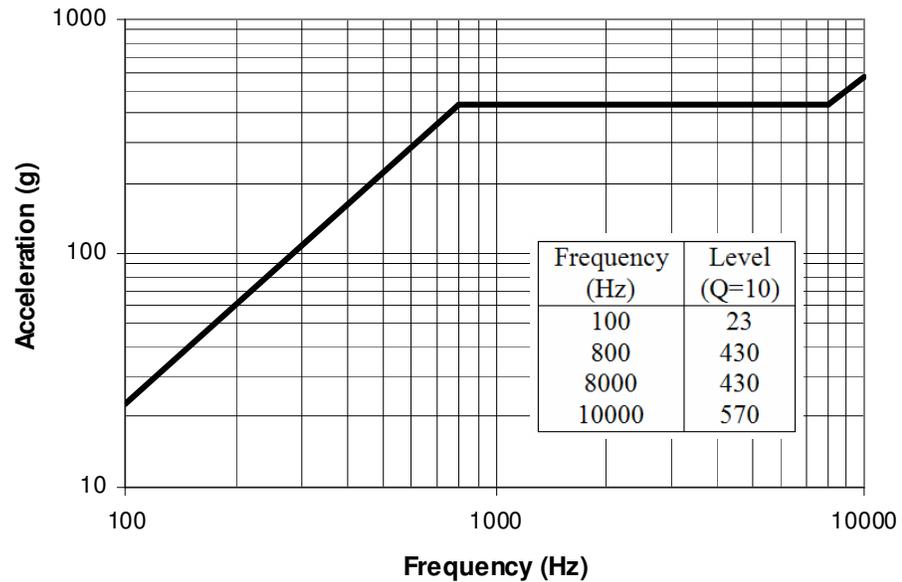

(CCR 01051)

- GIRD886 3.2.6.2.6.0-3 The flight shock accelerations on the launch vehicle side of the interface between the spacecraft and the launch vehicle **shall** produce a peak acceleration response spectra less than the limits set in the Flight Shock Limit Acceleration Response Spectra from the Launch Vehicle to Spacecraft Figure in **GIRD919** when using a quality factor, Q, of 10.


- GIRD919 3.2.6.2.6.0-4

ID **Object
Number**

**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**

GIRD919 3.2.6.2.6.0-4

**Flight Shock Limit Acceleration Response Spectra from the
Launch Vehicle to Spacecraft Figure**

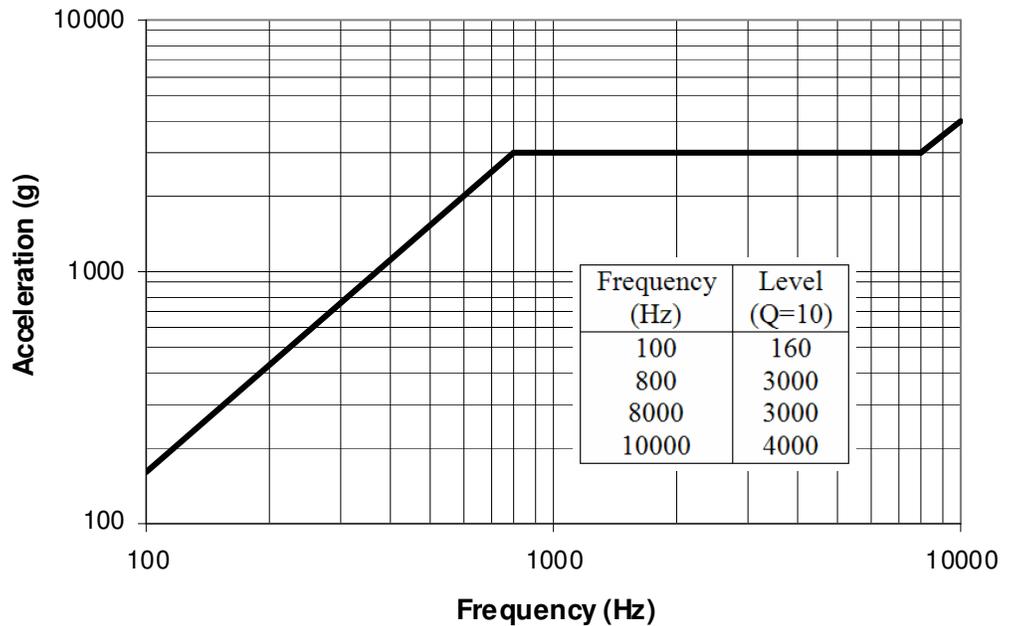

(CCR 01051)

GIRD604 3.2.6.2.7

3.2.6.2.7 Flight Acoustics

GIRD605 3.2.6.2.7.0-1

The spacecraft contractor will document in the ICD the predicted Maximum Expected Flight Level (MEFL) for the acoustic environment with 95 percent probability and with 50 percent confidence.

GIRD606 3.2.6.2.7.0-2

The MEFL with a 95th percentile and 50 percent confidence **shall** not exceed the one third octave band limit Sound Pressure Levels (SPL) listed by their center frequencies in the Flight Limit Acoustic Sound Pressure Levels Table and plotted in the Flight Limit Acoustic Sound Pressure Levels Figure.

ID **Object
Number**

**417-R-GIRD-0009, RM Version, GOES-R Series, General Interface
Requirements Document (GIRD)**


GIRD606 3.2.6.2.7.0-2

Flight Limit Acoustic Sound Pressure Levels Table

One-third Octave Bands			
Center Frequency (Hz)	Flight Limit Levels (dB*)	Center Frequency (Hz)	Flight Limit Levels (dB*)
31.5	124.6	630	124.5
40	127.0	800	123.0
50	128.5	1000	121.5
63	129.5	1250	120.0
80	130.0	1600	118.0
100	130.5	2000	116.5
125	130.5	2500	115.0
160	130.3	3150	113.0
200	129.5	4000	111.5
250	128.8	5000	109.5
315	128.0	6300	107.5
400	126.8	8000	106.0
500	125.5	10000	104.0
* Ref. pressure is 20 µPa		Overall	140.3

(CCR 01629)

Flight Limit Acoustic Sound Pressure Levels Figure

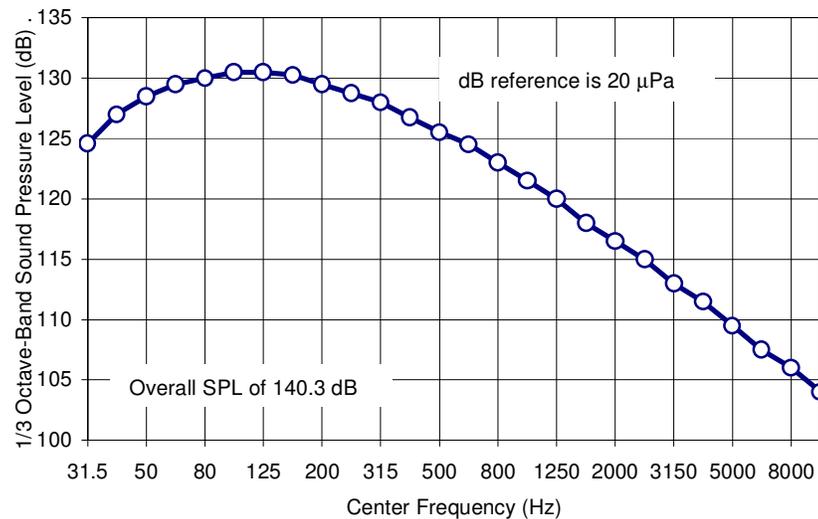

(CCR 00173) (CCR 01051)

GIRD607 3.2.6.3

3.2.6.3 On-Orbit Environment

GIRD608 3.2.6.3.1

3.2.6.3.1 Acceleration

GIRD609 3.2.6.3.1.0-1

Instrument flight hardware **shall** be designed to withstand a maximum acceleration of 0.040 (TBR) g on orbit without permanent degradation of performance.

GIRD612 3.2.6.3.2

3.2.6.3.2 Orbital Heat Flux

GIRD613 3.2.6.3.2.0-1

The following orbital heat flux magnitudes **shall** be assumed.

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD614	3.2.6.3.2.1	3.2.6.3.2.1 Direct Solar Flux
GIRD615	3.2.6.3.2.1.0-1	The maximum magnitude of direct solar flux to be used shall be $1414 \text{ W/m}^2 \pm 5 \text{ W/m}^2$ uncertainty occurring at earth perihelion.
GIRD616	3.2.6.3.2.1.0-2	The minimum magnitude of direct solar flux to be used shall be $1322 \text{ W/m}^2 \pm 5 \text{ W/m}^2$ uncertainty occurring at earth aphelion. Fluxes on specific dates may use a cosine interpolation between the perihelion and aphelion. (CCR 00021)
GIRD617	3.2.6.3.2.2	3.2.6.3.2.2 Non-Cryogenic Systems
GIRD618	3.2.6.3.2.2.0-1	For non-cryogenic instruments, only solar flux needs to be considered.
GIRD619	3.2.6.3.2.3	3.2.6.3.2.3 Cryogenic Systems
GIRD620	3.2.6.3.2.3.0-1	For cryogenic instruments, in addition to solar flux, earth reflected solar flux (albedo flux) and earth radiation shall be considered.
GIRD621	3.2.6.3.2.3.0-2	Earth reflected solar flux shall be modeled assuming a 0.26 albedo factor (Lambertian earth reflection assumed).
GIRD622	3.2.6.3.2.3.0-3	Earth IR shall be modeled assuming a 326 W/m^2 emitted radiance (at earth's surface), which is equivalent to a 20° C black body earth temperature.
GIRD623	3.2.6.3.2.4	3.2.6.3.2.4 Eclipse
GIRD624	3.2.6.3.2.4.0-1	Solar Eclipse shall be considered as part of the environmental variation. The Solar Eclipse season occurs twice yearly, with each eclipse season lasting approximately 45 days. The maximum eclipse duration is 72 minutes.
GIRD625	3.2.6.3.2.5	3.2.6.3.2.5 Lunar Eclipse
GIRD626	3.2.6.3.2.5.0-1	Lunar Eclipses shall be considered for instrument survivability. Lunar eclipses of 105 minutes maximum duration are rare occurrences.
GIRD627	3.2.6.3.2.5.0-2	Lunar Eclipses shall not be considered as a nominal operation design case.
GIRD629	3.3	3.3 Attitude and Orbit Data
GIRD946	3.3.0-1	All attitude, rate and orbit data shall be included in the spacecraft ancillary data packet.
GIRD630	3.3.1	3.3.1 Attitude Knowledge
GIRD631	3.3.1.0-1	The spacecraft shall provide a periodic attitude estimate to the instrument.
GIRD632	3.3.1.1	3.3.1.1 Representation
GIRD633	3.3.1.1.0-1	The attitude estimate shall be a quaternion representation of the attitude of the instrument mounting frame relative to the J2000 inertial reference frame.
GIRD634	3.3.1.2	3.3.1.2 Accuracy
GIRD635	3.3.1.2.0-1	The attitude knowledge static error shall not exceed 1200 microradians, 3-sigma, per axis, pre-calibration. This requirement together with the next two define separate static, diurnal and dynamic attitude knowledge components. These requirements bound the knowledge error, which is the difference between the estimated attitude and the true attitude. (CCR 01015A)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1212	3.3.1.2.0-2	The attitude knowledge diurnal error shall not exceed 45 microradians, 3-sigma, per axis. Diurnal error refers to that portion of the error that repeats from day-to-day. (CCR 01015A)
GIRD1211	3.3.1.2.0-3	The attitude knowledge dynamic error shall not exceed 30 microradians, 3-sigma, per axis. Dynamic error includes all non-static and non-diurnal errors. (CCR 01015A)
GIRD636	3.3.1.3	3.3.1.3 Update Rate
GIRD637	3.3.1.3.0-1	The spacecraft shall update the attitude estimate at a rate no less than 1 Hz.
GIRD638	3.3.1.4	3.3.1.4 Latency
GIRD639	3.3.1.4.0-1	The attitude estimate latency shall not exceed 100 milliseconds.
GIRD1214	3.3.1.5	3.3.1.5 Stability (CCR 01015A)
GIRD1213	3.3.1.5.0-1	Attitude knowledge error stability shall not exceed 5 microradians, per axis, over any 30 second window. Attitude knowledge stability is defined as the change in attitude knowledge error over a specified period of time (window). (CCR 01015A)
GIRD1215	3.3.1.5.0-2	Attitude knowledge error stability shall not exceed 10 microradians, per axis, over any 300 second window. (CCR 01015A)
GIRD1216	3.3.1.5.0-3	Attitude knowledge error stability shall not exceed 15 microradians, per axis, over any 600 second window. (CCR 01015A)
GIRD1217	3.3.1.5.0-4	Attitude knowledge error stability shall not exceed 19 microradians, per axis, over any 900 second window. (CCR 01015A)
GIRD640	3.3.2	3.3.2 Spacecraft Angular Rate
GIRD641	3.3.2.0-1	The spacecraft shall provide a periodic angular rate estimate to the instrument.
GIRD642	3.3.2.1	3.3.2.1 Representation
GIRD643	3.3.2.1.0-1	The spacecraft angular rate data shall be the inertial angular rate of the spacecraft, in units of microradians per second, resolved in the instrument mounting frame defined in GIRD1064 .
GIRD644	3.3.2.2	3.3.2.2 Accuracy
GIRD645	3.3.2.2.0-1	The accuracy of the spacecraft angular rate estimate is characterized by the integral of the rate error over a specified time window. The rate error is defined as the difference between the estimated rates and the actual rates of the spacecraft. The integrated rate error includes all residual IRU errors after compensation by the spacecraft and also includes errors due to alignment knowledge error between the IRU input axes and the instrument mounting frame. (CCR 01038)
GIRD646	3.3.2.2.0-2	The integrated rate error of the spacecraft angular rate estimate shall not exceed 1 microradians, 3-sigma, per axis, over any 1 second window. (CCR 01015A)
GIRD647	3.3.2.2.0-3	The integrated rate error of the spacecraft angular rate estimate shall not exceed 2 microradians, 3-sigma, per axis, over any 30 second window. (CCR 01015A)
GIRD648	3.3.2.2.0-4	The integrated rate error of the spacecraft angular rate estimate shall not exceed 7 microradians, 3-sigma, per axis, over any 300 second window. (CCR 01015A)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD1210	3.3.2.2.0-5	The integrated rate error of the spacecraft angular rate estimate shall not exceed 20 microradians, 3-sigma, per axis, over any 900 second window. (CCR 01015A)
GIRD649	3.3.2.3	3.3.2.3 Bandwidth
GIRD650	3.3.2.3.0-1	The spacecraft angular rate estimate shall have a minus 3dB bandwidth of greater than 25 Hz.
GIRD976	3.3.2.3.0-2	The spacecraft contractor will document in the instrument ICD the gyro rate frequency response function from 0 Hz to at least ten times the -3dB gyro bandwidth.
GIRD651	3.3.2.4	3.3.2.4 Update Rate
GIRD652	3.3.2.4.0-1	The spacecraft shall update the angular rate estimate at a rate no less than 100 Hz.
GIRD654	3.3.2.4.0-2	Spacecraft angular rate sampling shall be uniform to within ± 20 microseconds.
GIRD653	3.3.2.5	3.3.2.5 Phase Delay
GIRD655	3.3.2.5.0-1	For a given instrument mounting frame attitude error rate, the total spacecraft gyro signal phase delay shall not exceed the corresponding limit from the Total Spacecraft Gyro Signal Phase Delay and Rate Error Trade Space Figure (GIRD155 [3.2.1.7.1.2.0-1]) for sinusoidal excitations at 10 Hz or below. For sinusoidal system excitation, $\sin(\omega t)$, the phase delay, t_d , in the system output is defined as $\sin(\omega(t - t_d))$. Phase delay includes all delays from the time a physical event occurs through the time the data recording the event is received at the instrument. It includes sensor dynamics, sensor delay, spacecraft processor delays and SpaceWire delays. (CCR 00236)
GIRD656	3.3.2.5.0-2	The spacecraft angular rate estimate phase delay shall be stable to within ± 5 milliseconds. (CCR 01038)
GIRD657	3.3.3	3.3.3 Spacecraft Orbit
GIRD658	3.3.3.0-1	The spacecraft shall provide a periodic spacecraft orbit estimate to the instrument via the ancillary data packet.
GIRD659	3.3.3.1	3.3.3.1 Representation
GIRD660	3.3.3.1.0-1	The spacecraft orbit estimate shall include Cartesian position and velocity vectors in the EME J2000 ECI frame described in USNO Circular 179, and a time tag corresponding to the orbit vectors. (CCR 00020A) (CCR 01832)
GIRD661	3.3.3.2	3.3.3.2 Accuracy
GIRD662	3.3.3.2.0-1	The spacecraft position estimate shall be accurate to 100 meters 3-sigma, in-track (ORF x-axis), cross-track (ORF y-axis) and radial (ORF z-axis) directions. (CCR 00020A) (CCR00084)
GIRD663	3.3.3.2.0-2	The spacecraft velocity estimate shall be accurate to within 6 cm/sec, 3-sigma, per axis. (CCR 00040A) (CCR 01015A)
GIRD664	3.3.3.3	3.3.3.3 Update Rate
GIRD665	3.3.3.3.0-1	The spacecraft shall update the orbit estimate at a rate no less than 1 Hz. (CCR 00096A)

ID Object Number 417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)

GIRD666 3.3.3.4 **3.3.3.4 Latency**

GIRD667 3.3.3.4.0-1 The spacecraft orbit estimate latency **shall** not exceed 1 second.

GIRD1218 3.3.3.5 **3.3.3.5 Stability (CCR 01015A)**

GIRD1219 3.3.3.5.0-1 Orbit position knowledge error stability **shall** not exceed the levels specified in the following table:

Axis	Stability Window			
	Any 30 Sec	Any 300 sec	Any 600 sec	Any 900 sec
In-Track	3 m	20 m	30 m	35 m
Cross-Track	3 m	20 m	30 m	35 m
Radial	7 m	40 m	60 m	70 m

Orbit position knowledge stability is defined as the change in orbit position knowledge error over a specified period of time (window). (CCR 01015A)

GIRD668 3.4 **3.4 Instrument GSE to Spacecraft I&T GSE Interface**

GIRD921 3.4.0-1 Instrument GSE **shall** receive instrument telemetry via the spacecraft electrical GSE.

GIRD922 3.4.0-2 Commanding of the instrument **shall** be from the spacecraft electrical GSE.

GIRD783 3.5 **3.5 Contamination Control**

GIRD784 3.5.1 **3.5.1 Instrument and Spacecraft Ground Processing**

GIRD785 3.5.1.1 **3.5.1.1 Facility Requirements**

GIRD1222 3.5.1.1.0-1 During observatory level I&T and launch processing facility operations airborne particle fallout **shall** not exceed 0.0022 percent area coverage (%AC) per month in an ISO 14644-1 Class 6 facility. (CCR 01216)

GIRD793 3.5.1.1.0-2 During observatory level I&T and launch processing facility operations airborne particle fallout **shall** not exceed 0.022 percent area coverage (%AC) per month in an ISO 14644-1 Class 7 facility. (CCR 00115)

GIRD794 3.5.1.1.0-3 During observatory level I&T and launch processing facility operations airborne particle fallout **shall** not exceed 0.22 %AC per month in an ISO 14644-1 Class 8 facility. (CCR 00115)

GIRD795 3.5.1.1.0-4 During observatory level I&T and launch processing facility operations airborne molecular fallout **shall** not exceed 0.30 micrograms per square centimeter ($\mu\text{g}/\text{cm}^2$) per month in a cleanroom. (CCR 00115)

GIRD788 3.5.1.1.0-5 During observatory level I&T and launch processing facility operations flight hardware **shall** be processed in an ISO 14644-1 Class 7 (TBR) cleanroom or better when contamination sensitive surfaces are exposed. (CCR 00115)

GIRD787 3.5.1.1.0-6 During observatory level I&T and launch processing facility operations flight hardware **shall** be processed in an ISO 14644-1 Class 8 (TBR) cleanroom or better when contamination sensitive surfaces are covered. Optical solar reflectors (OSRs) and solar panels are exceptions and may be exposed in an ISO 14644-1 Class 8 cleanroom. (CCR 00115)

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)
GIRD789	3.5.1.1.0-7	The spacecraft contractor will be responsible for testing and monitoring ISO 14644-1 Class conformance during observatory I&T and launch processing facility operations. Conformance will be determined by monitoring both airborne particle counts larger than 0.5 µm and airborne particle counts larger than 5.0 µm per the measurement and test methods described in ISO 14644-3 (TBR). <i>(CCR 00115)</i>
GIRD792	3.5.1.1.0-8	During observatory level I&T and launch processing facility operations flight hardware shall be maintained in a relative humidity environment between 30 and 60%. <i>(CCR 00115)</i>
GIRD798	3.5.1.2	3.5.1.2 Ground Support Equipment Requirements
GIRD801	3.5.1.2.0-1	GSE hardware used in vacuum testing shall outgas less than 1×10^{-8} g/cm ² -hr at 10°C above the maximum survival temperature of the flight hardware that they are tested with when measured with a QCM held at -65°C (208 K). <i>(CCR 00115)</i>
GIRD1158	3.5.1.2.0-2	Any GSE which must accompany the instrument or spacecraft into a cleanroom area shall be visibly clean per SN-C-0005 (JSC) (TBR). <i>(CCR 00115)</i>
GIRD1159	3.5.1.2.0-3	Any GSE which must contact flight hardware in a cleanroom area shall meet the same cleanliness requirement as the cleanest flight hardware it will contact once in the cleanroom. <i>(CCR 00115)</i>
GIRD802	3.5.1.3	3.5.1.3 Purge Requirements
GIRD803	3.5.1.3.0-1	Prior to instrument integration on the spacecraft and during any subsequent instrument deintegration periods the instrument contractor will be responsible for providing a gas purge to the instrument optical cavity during all storage, test, and transport operations if required by the instrument. <i>(CCR 00115)</i>
GIRD1160	3.5.1.3.0-2	Following instrument integration on the spacecraft the spacecraft contractor will be responsible for providing a gas purge to the instrument optical cavities during all storage, test, and transport operations if required by the instrument. <i>(CCR 00115)</i>
GIRD1161	3.5.1.3.0-3	During observatory level I&T and launch processing facility operations spacecraft provided purge gas properties shall be coordinated with the instrument providers and detailed in the ICD. <i>(CCR 00115)</i>
GIRD812	3.5.1.4	3.5.1.4 Ground Storage/Transportation Requirements
GIRD813	3.5.1.4.0-1	During extended inactivity, storage, and transportation periods, the instrument shall be bagged in an instrument provided ESD protective material. <i>(CCR 00115)</i>
GIRD1162	3.5.1.4.0-2	During storage and transportation periods the observatory shall be bagged in a spacecraft provided ESD protective material. Spacecraft provided observatory bagging will be used in addition to the instrument provided instrument bagging. <i>(CCR 00115)</i>
GIRD814	3.5.1.4.0-3	Storage and transport accommodations shall not transfer more than 0.02 %AC of particles during storage or transport periods. <i>(CCR 00115)</i>
GIRD815	3.5.1.4.0-4	Storage and transport accommodations shall not transfer more 0.30 µg/cm ² of molecular contamination during storage or transport periods. <i>(CCR 00115)</i>
GIRD1163	3.5.1.4.0-5	During storage and transportation periods the observatory shall be maintained in an ISO 14644-1 Class 8 controlled environment. <i>(CCR 00115)</i>
GIRD1164	3.5.1.4.0-6	During storage and transportation periods the observatory shall be maintained in a relative humidity environment between 30 and 60%. <i>(CCR 00115)</i>
GIRD820	3.5.2	3.5.2 Mission Considerations

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)	
GIRD821	3.5.2.1	3.5.2.1 Design	
GIRD822	3.5.2.1.0-1	Multi Layer Insulation (MLI) venting and spacecraft vents shall be directed away from instrument optical ports, instrument thermal control surfaces, and spacecraft thermal control surfaces.	
GIRD823	3.5.2.1.0-2	All MLI joints shall be sealed shut prior launch, so that only the planned vent paths allow outgassed molecular species to escape. This requirement will not supersede any requirement for thermal isolation. It is meant to reduce outgassing in an unplanned direction.	
GIRD1165	3.5.2.1.0-3	The number, location, size, and orientation of all instrument and spacecraft vents shall be detailed in the ICD. (<i>CCR 00115</i>)	
GIRD830	3.5.2.2	3.5.2.2 Mission Performance	
GIRD831	3.5.2.2.1	3.5.2.2.1 Particulate Contamination	
GIRD832	3.5.2.2.1.0-1	The combined spacecraft and instrument particulate contamination contribution shall produce no more than a 0.3% (TBR) area coverage of particles to any exposed sensitive surface at end of life. Spacecraft and instrument specific particulate contamination allocations will be detailed in the ICD. (<i>CCR 00115</i>)	
GIRD833	3.5.2.2.2	3.5.2.2.2 Molecular Contamination	
GIRD834	3.5.2.2.2.0-1	The combined spacecraft and instrument external molecular contamination contribution shall produce no more than 6 $\mu\text{g}/\text{cm}^2$ mass flux impingement at the instrument thermal control surface apertures, and the instrument optical aperture at end of life. Spacecraft and instrument specific molecular contamination allocations will be detailed in the ICD.	
		Note - the following guidelines will be used for instrument analyses:	
		The instrument contractor will assume 10% of the incident external molecular contamination is photo chemically deposited on surfaces that are exposed to solar UV flux.	
		The instrument contractor will use a transformation value of 0.01 solar absorptance units per 100 Angstroms of NVR on fused quartz optical solar reflectors (OSRs). (<i>CCR 00115</i>) (<i>CCR 01216</i>)	
GIRD837	3.5.2.2.2.0-2	The BOL outgassing rates from the molecular contamination analysis for instruments, spacecraft main body, MLI, and the solar array shall be verified using a quartz crystal microbalance. BOL outgassing is the final outgassing rate determined during system-level thermal vacuum testing at the mission high temperature, plus 10°C.	
GIRD1139	3.6	3.6 Acronyms	
GIRD1140	3.6.0-1	%AC	percent area coverage
		A	Ampere(s)
		ASD	Acceleration Spectral Density
		BOL	beginning of life
		BRF	body reference frame
		bps	bits per seconds
		C	Celsius (Degrees)
		cm	centimeter
		db	decibel
		dc	Direct Current
		ECSS	European Cooperation for Space Standardization
		EED	Electro-Explosive Device
		EEE	Electrical, Electronic and Electromechanical
		ESD	electro static discharge

ID	Object Number	417-R-GIRD-0009, RM Version, GOES-R Series, General Interface Requirements Document (GIRD)	
GIRD1140	3.6.0-1	FOR	field of regard
		FOV	field-of-view
		g	Earth's gravitational acceleration
		GIRD	General Interface Requirements Document
		GOES	Geosynchronous Operational Environmental Satellite
		GSE	Ground Support Equipment
		GSFC	Goddard Space Flight Center
		Hz	hertz
		ICD	Interface Control Document
		IDD	Instrument Description Document
		IRU	inertial reference unit
		ISO	International Office for Standardization
		K	kelvin
		kg	kilogram
		Km	kilometer
		kPa	Kilo Pascals
		LOS	line-of-sight
		LSB	Least Significant Bit
		m	meter
		ma	milli-ampere(s)
		Mbps	Mega bits per seconds
		MHz	Mega hertz
		mm	millimeter
		MAT	Mission Allowable Temperatures
		MEFL	Maximum Expected Flight Level
		m-g	milli-g (Earth's gravitational acceleration)
		MLI	Multi-layer insulation
		Ms	milli-seconds
		NASA	National Aeronautics and Space Administration
		N-m	Newton-meter
		N-m-sec	Newton-meter-second
		nPa	Nano Pascals
		NVR	Non-Volatile Residue
		ORF	Orbit reference frame
		OSR	Optical solar reflectors
		PPB	Parts Per Billion
		PPM	Parts Per Million
		PPS	Pulse Per Second
		PSD	power spectral density
		QCM	Quartz Crystal Microbalance
		RIU	Remote Interface Unit
		SCF	SPP Coordinate Frame
		SI	International System of Units
		SINDA	System Integrated Numerical Differential Analyzer
		SIS	Solar Imaging Suite
		SPP	Sun-Pointing Platform
		SRS	Shock Response Spectra
		TBD	to be determined
		TBR	to be refined/reviewed
		THC	Total Hydrocarbons
		UIID	Unique Instrument Interface Document
		UTC	Universal Time Code
		µsec	mico-seconds
		V	Volts
		Vdc	Volts-Direct Current
		W	Watts

417-R-GIRD-0009 DCR

CCR #: 00005 Rev
CCB Status: **Approved**
CCB Date: 12/7/2004
Doc Change Date: 12/7/2004

Title: GIRD Orbit and Body Reference Frames (ORF/BRF)
GOES S/C: R Effectivity: S/C and Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Clarifies ORF and BRF definitions and makes BRF a
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.1.4 - 1, 3.1.4 - 2
DOORS Version: GIRD 2.0
DOORS ID #: GIRD52, GIRD53

CCR #: 00009 Rev
CCB Status: **Approved**
CCB Date: 12/7/2004
Doc Change Date: 12/7/2004

Title: Simplification of Survival Heater Power Interface
GOES S/C: R Effectivity: S/C and Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Simplifies survival heater power requirements.
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD: 3.2.3.2.3, 3.2.3.2.4, 3.2.3.2.6, 3.2.3.2.7
DOORS Version: GIRD 2.0
DOORS ID #: GIRD360, 361, 362, 363, 365, 366, 367, 368, 370, 371, 373, 374, 376, 377, 378, 380, 381, 382, 383, 390, 392, 930, 397

CCR #: 00021 Rev
CCB Status: **Approved**
CCB Date: 12/7/2004
Doc Change Date: 12/7/2004

Title: GIRD Typos Cleanup
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Corrects typos in the GIRD
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.2.2.6.1, 3.2.6.3.2.1
DOORS Version: GIRD 2.0
DOORS ID #: GIRD221 (3.2.2.6.1-1), GIRD616 (3.2.6.3.2.1-2)

CCR #: 00023 Rev
CCB Status: **Approved**
CCB Date: 12/7/2004
Doc Change Date: 12/7/2004

Title: Flight Sinusoidal Vibration Limit Adjustment
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Adjusts the Flight Sinusoidal Vibration Limit.
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.2.6.2.5
DOORS Version: GIRD 2.0
DOORS ID #: GIRD599 (3.2.6.2.5-2)

CCR #: 00008 Rev A
CCB Status: **Approved**
CCB Date: 2/18/2005
Doc Change Date: 3/15/2005

Title: GIRD Grounding Section Clean-up
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Updates SC and instrument grounding requirements.
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD: 3.2.4.1, 3.2.4.2, 3.2.4.3
DOORS Version: GIRD 2.0
DOORS ID #: GIRD1058 (3.2.4.1-4), 404 (3.2.4.1-5), 972 (3.2.4.1-6), 411 (3.2.4.2-1), 412 (3.2.4.2-2), 948 (3.2.4.2-3), 417 (3.2.4.3-3)

CCR #: 00020 Rev A
CCB Status: **Approved**
CCB Date: 2/18/2005
Doc Change Date: 3/15/2005

Title: GIRD Orbit Knowledge Clarifications
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Clarifies Orbit Knowledge.
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.3.3.1, 3.3.3.2
DOORS Version: GIRD 2.0
DOORS ID #: GIRD660 (3.3.3.1-1), GIRD662 (3.3.3.2-1)

CCR #: 00041 Rev A
CCB Status: **Approved**
CCB Date: 2/18/2005
Doc Change Date: 3/15/2005

Title: Delete GIRD968 - Duplicates ABIMAR795 Electromagnetic Compatibility Requirements
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
CCR Summary: Deletes duplicate electromagnetic compatibility requirements.
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.2.4.5.2
DOORS Version: GIRD 2.0
DOORS ID #: GIRD968 (3.2.4.5.2-1)

CCR #: 00077 Rev
CCB Status: **Approved**
CCB Date: 2/18/2005

Title: SIS Pointing Requirements Update
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

Doc Change Date: 3/15/2005

CCR Summary: Update of SIS pointing requirements

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 3.2.1.5.2, 3.2.1.8

DOORS Version: GIRD 2.0

DOORS ID #: GIRD1093 (3.2.1.5.2.1-1) 1094 (-2), 1095 (-3), 1097 (-5), 1099 (3.2.1.5.2.2-1), 1100 (-2), 1101 (-3), 1102 (-4), 1104 (3.2.1.5.2.3-1), 1112 (3.2.1.8-1), 1113 (3.2.1.8-2), 1116 (3.2.1.8.1.1-1), 1138 (-2), 1117 (-3), 1118 (-4), (TBD) (-5), 1120 (3.2.1.8.1.2-1)

CCR #: 00040 Rev **A**

CCB Status: **Approved**

CCB Date: 4/1/2005

Doc Change Date: 4/1/2005

Title: Relaxation of Orbit Velocity Accuracy

GOES S/C: R Effectivity: S/C & Instruments

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

CCR Summary: Relaxation of Orbit Velocity accuracy requirement and correction of DOORS object ID number.

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 3.3.3.2

DOORS Version: GIRD 2.0

DOORS ID #: GIRD663 (3.3.3.2-2)

CCR #: 00084 Rev

CCB Status: **Approved**

CCB Date: 4/1/2005

Doc Change Date: 4/1/2005

Title: GIRD Orbit Position Accuracy Requirement

GOES S/C: R Effectivity: S/C & Instruments

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 3.3.3.2

DOORS Version: GIRD 2.0

DOORS ID #: GIRD662 (3.3.3.2-1)

CCR #: 00095 Rev

CCB Status: **Approved**

CCB Date: 6/8/2005

Doc Change Date: 6/13/2005

Title: Move SIS Pointing from GIRD to UIID

GOES S/C: R Effectivity: Instruments

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

Doc #: 417-R-GIRD-0009, 417-R-SISUIID-0034

Doc Section #: GIRD: 3.2.1.5.2 and 3.2.1.8; SIS UIID: 5.3 and 5.4

DOORS Version: GIRD 2.1

DOORS ID #: GIRD1091 - 1108, GIRD166, GIRD1112 - 1116, GIRD1138,

GIRD1117, 1118, GIRD1142-1145, GIRD1119 - 1133,

CCR #: 00098 Rev

CCB Status: **Approved**

CCB Date: 7/8/2005

Doc Change Date: 7/8/2005

Title: Requirements terminology standardization

GOES S/C: R Effectivity: S/C & Instruments

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 1.2

DOORS Version: GIRD 2.1

DOORS ID #: GIRD4, GIRD1154 (1.2-1), GIRD1146 (1.2-2), GIRD1147 (1.2-3), GIRD1148 (1.2-4), GIRD1149 (1.2-5), GIRD1150 (1.2-6), GIRD1151 (1.2-7), GIRD1152 (1.28), GIRD1153 (1.2-9), GIRD5

CCR #: 00096 Rev **A**

CCB Status: **Approved**

CCB Date: 7/25/2005

Doc Change Date: 8/1/2005

Title: GIRD Object Text Language Clean-Up

GOES S/C: R Effectivity: S/C & Instruments

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 3.2.1.4.2, 3.2.5.9, 3.2.6.1, 3.2.6.2, 3.3.3.3

DOORS Version: GIRD 2.1

DOORS ID #: GIRD104 (3.2.1.4.2-1), -2, -3, -4, -5, -6, -7, -8, -9(add), GIRD463 (3.2.5.9-1),

GIRD935 (3.2.6.1-1), GIRD577 (3.2.6.2-1), GIRD665 (3.3.3.3-1)

CCR #: 00109 Rev

CCB Status: **Approved**

CCB Date: 8/1/2005

Doc Change Date: 8/1/2005

Title: GIRD Reliable Delivery Protocol

GOES S/C: R Effectivity: S/C & Instruments

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 2.1, 3.2.5.2.1

DOORS Version: GIRD 2.1

DOORS ID #: GIRD11 (2.1-1), GIRD933 (3.2.5.2.1-1)

CCR #: 00081 Rev **A**

CCB Status: **Approved**

CCB Date: 6/8/2005

Doc Change Date: 8/12/2005

Title: Mass Acceleration Curve Limit for Flight Accelerations

GOES S/C: R Effectivity: Instruments

Contract # NNG0 - NNG04HZ07C

Doc #: 417-R-GIRD-0009

Doc Section #: GIRD 3.2.6.2.3

DOORS Version: GIRD 2.2

DOORS ID #: GIRD589 (3.2.6.2.3-2)

CCR #: 00108 Rev

CCB Status: **Approved**

Title: Redundant Power Cable Harnesses

GOES S/C: R Effectivity: S/C & Instruments

CCB Date: 8/12/2005
Doc Change Date: 8/12/2005

Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 5HY06C, 5HY07C
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.2.3, 3.2.4
DOORS Version: GIRD 2.3
DOORS ID #: GIRD (TBD) (3.2.3.1.1.1-5), GIRD(TBD) (3.2.4.5.3-3)

CCR #: 00115 Rev
CCB Status: **Approved**
CCB Date: 2/23/2006

Doc Change Date: 2/23/2006

Title: GIRD Contamination Section Update
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 2.1, 3.5
DOORS Version: GIRD 2.4
DOORS ID #: GIRD11 (2.1-1), GIRD793 (3.5.1.1.0-1), 794-2, 795-3, 796-4, 788-5(now 4), 787-6(5), 789-7(6), 792-8(7), 801 (3.5.1.2.0-1), 799-2, 800-3, tbd-2,-3, GIRD803 (3.5.1.3.0-1), tbd-2, 804-2, 805-3, 806-4, 809-5, 810-6, tbd (3.5.1.3.0-3), tbd (3.5.1.4.0-2), 814-2(3), 815-3(4), 816-4, tbd -5, -6, 817 (3.5.1.5) 818-1, 819-2, 824 (3.5.2.1.0-3), 825-4, 826-5, 827-6, 828-7, 829-8, tbd(3.5.2.1.0-3), 832 (3.5.7.2.1.0-1), 834 (3.5.2.2.0-1), 835-2, 836-3, 837-4 (2)

CCR #: 00173 Rev
CCB Status: **Approved**
CCB Date: 4/13/2006

Doc Change Date: 04/13/2006

Title: Acoustic Levels Specification
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.6.2.7
DOORS Version: GIRD 2.5
DOORS ID #: GIRD606 (3.2.6.2.7.0-2)

CCR #: 00158 Rev
CCB Status: **Approved**
CCB Date: 5/4/2006
Doc Change Date: 5/4/2006

Title: GIRD CCSDS Reference Document and Source Packet Update
GOES S/C: R Effectivity: SC & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, GLM RFP. SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: 2.1, 3.2.5.4
DOORS Version: GIRD 2.6
DOORS ID #: GIRD11 (2.1.0-1), GIRD429 (3.2.5.4.0-1)

CCR #: 00165 Rev
CCB Status: **Approved**
CCB Date: 3/23/2006

Doc Change Date: 6/2/2006

Title: GIRD Discrete Control Signals Update
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C. SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.5.9.4, 3.2.5.9.7
DOORS Version: GIRD 2.7
DOORS ID #: GIRD474 (3.2.5.9.4.0-1), GIRD984 (3.2.5.9.7.0-1), GIRD (TBD)

CCR #: 00196 Rev
CCB Status: **Approved**
CCB Date: 6/2/2006

Doc Change Date: 6/2/2006

Title: GIRD Mass Acceleration Curve Update
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.6.2.3
DOORS Version: GIRD 2.7
DOORS ID #: GIRD589 (3.2.6.2.3.0-2)

CCR #: 00213 Rev
CCB Status: **Approved**
CCB Date: 6/2/2006

Doc Change Date: 7/7/2006

Title: Change GIRD GRDDP Applicable Document Version
GOES S/C: R Effectivity: SC & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: 2.1
DOORS Version: GIRD 2.8
DOORS ID #: GIRD11 (2.1.0-1)

CCR #: 00163 Rev
CCB Status: **Approved**
CCB Date: 5/4/2006
Doc Change Date: 7/8/2006

Title: Change GIRD Mechanical Disturbance Requirements to Eliminate Spacecraft Model
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, GLM RFP. SEISS #td
Doc #: 417-R-GIRD-0009
Doc Section #: GIRD 3.2.1.7
DOORS Version: GIRD 2.9
DOORS ID #: GIRD 157, 1110

CCR #: 00229 Rev
CCB Status: **Approved**
CCB Date: 8/1/2006

Doc Change Date: 8/1/2006

Title: Data Transfer Clock Rate Change
GOES S/C: R Effectivity: SC & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #tbd
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.5.5
DOORS Version: GIRD 2.10
DOORS ID #: GIRD441 (3.2.5.5.0-1)

CCR #: 00250 Rev
CCB Status: **Approved**
CCB Date: 8/1/2006

Doc Change Date: 8/1/2006

Title: GIRD SIS Thermal
GOES S/C: R Effectivity: SIS Instrument
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #tbd
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.2.1
DOORS Version: GIRD 2.10
DOORS ID #: GIRD172 (3.2.2.1.0-1)

CCR #: 00236 Rev
CCB Status: **Approved**
CCB Date: 10/17/2006

Doc Change Date: 10/17/2006

Title: GIRD Spacecraft Attitude Error Rate and Gyro Phase Delay
GOES S/C: R Effectivity: SC & Instruments
Contract # NNG0 - Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #tbd
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.1.7.1.2, 3.3.2.5
DOORS Version: GIRD 2.11
DOORS ID #: GIRD155 (3.2.1.7.1.2.0-1), GIRD655 (3.3.2.5.0-1)

CCR #: 00274 Rev
CCB Status: **Approved**
CCB Date: 8/31/2006

Doc Change Date: 10/18/2006

Title: Baseline Release or 417-R-RPT-0027 and GIRD Reference Update
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SEISS #tbd
Doc #: 417-R-RPT-0027, 417-R-GIRD-0009
Doc Section #: 2, RPT All
DOORS Version: GIRD 2.12
DOORS ID #: GIRD11 (2.1.0-1), RPT N/A

CCR #: 00309 Rev
CCB Status: **Approved**
CCB Date: 10/10/2006

Doc Change Date: 11/27/2006

Title: Delete GIRD Nadir Temperature Controlled Platform
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SUVI/EXIS TBD
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.2.3
DOORS Version: GIRD 2.13
DOORS ID #: GIRD202 (3.2.2.3.0-2)

CCR #: 00332 Rev
CCB Status: **Approved**
CCB Date: 11/27/2006
Doc Change Date: 11/27/2006

Title: Alignment and Disturbance Related Requirement Clarification for
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, 6HX11C, 6HX12C, 6HX13C, SUVI/EXIS TBD
Doc #: 417-R-GIRD-0009, 417-R-SEISSUIID-0031
Doc Section #: GIRD 3.2.1.5.1, 3.2.1.7, SEISSUIID 5.1
DOORS Version: GIRD 2.13
DOORS ID #: GIRD128 (3.2.1.5.1), 149 (3.2.1.7), SEISSUIID72 (5.1), 69 (5.1.0-1), 75 (5.1.0-2, chg to 3.3.5.0-2), tbd (3.3.5.0-3), 76 (5.1.0-3, chg to 3.3.5.0-4), 73 (5.2, chg to 5.1), 74 (5.2.0-1, chg to 5.1.0-1)

CCR #: 00161 Rev **B**
CCB Status: **Approved**
CCB Date: 10/23/2006
Doc Change Date: 2/22/2007

Title: GIRD Instrument Electrical Power Section Update
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, Info 4HZ48C, 4HZ49C, 4HZ50C, 4HZ65C, GLM RFP. SEISS #tbd
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.3
DOORS Version: GIRD 2.14
DOORS ID #: ALL

CCR #: 00372 Rev
CCB Status: **Approved**
CCB Date: 2/27/2007

Doc Change Date: 2/22/2007

Title: Update GRDDP Reference in GIRD Applicable Documents List
GOES S/C: R Effectivity: Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, Info 4HZ48C, 4HZ49C, 4HZ50C, 6HX11C, 6HX12C, 6HX13C, SUVI/EXIS TBD
Doc #: 417-R-GIRD-0009
Doc Section #: 2, 3.2.5.4.2
DOORS Version: GIRD 2.14

DOORS ID #: GIRD11 (2.1-1), GIRD433 (3.2.5.4.2.0-1)

CCR #: 1015 Rev
CCB Status: **Approved**
CCB Date: 5/30/2007
Doc Change Date: 7/12/2007

Title: GIRD GN&C Requirements Updates
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, Info GLM/SUVI/EXIS TBD
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.1.5, 3.2.1.7, 3.3.1.2, 3.3.2.2, 3.3.3.2
DOORS Version: GIRD 2.15
DOORS ID #: GIRD153, 154, 155, 635, 646, 647, 648, 663, 1067, 1069, 1088

CCR #: 00350 Rev
CCB Status: **Approved**
CCB Date: 7/12/2007
Doc Change Date: 7/12/2007

Title: GIRD Gyro Requirements
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, Info GLM/SUVI/EXIS TBD
Doc #: 417-R-GIRD-0009
Doc Section #: 3.3.2.3
DOORS Version: GIRD 2.15
DOORS ID #: GIRD973 (3.3.2.3-2), GIRD974 (3.3.2.3-3), GIRD975 (3.3.2.3-4)

CCR #: 1038 Rev
CCB Status: **Approved**
CCB Date: 7/12/2007
Doc Change Date: 7/12/2007

Title: GIRD Post PDRR GN&C Requirements Updates
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, Info GLM/SUVI/EXIS TBD
Doc #: 417-R-GIRD-0009
Doc Section #: 3.3.2.2, 3.3.2.3, 3.3.2.5
DOORS Version: GIRD 2.15
DOORS ID #: GIRD645, 656, 973, 974, 975, 1068, 1069

CCR #: 1051 Rev
CCB Status: **Approved**
CCB Date: 8/20/2007
Doc Change Date: 8/20/2007

Title: Update GIRD Launch Environments Including Instrument Shock v2
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.6.2
DOORS Version: GIRD 2.16
DOORS ID #: GIRD885 (3.2.6.2.6.0-2), GIRD600 (3.2.6.2.5.0-3), GIRD919 (3.2.6.2.6.0-4)
GIRD590 (3.2.6.2.3.0-3), GIRD606 (3.2.6.2.7.0-2)

[CM Note: admin change made to the GIRD by addition of CCR 236 reference in GIRD155 and removal of CCR 0095 references in GIRD 1117, 1119, 1120, and 1138.](#)

CCR #: 1183 Rev
CCB Status: **Approved**
CCB Date: 4/10/2008
Doc Change Date: 11/12/2008

Title: GIRD Update
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.1.2, 3.2.1
DOORS Version: GIRD 2.17
DOORS ID #: GIRD44 (3.1.2.3.0-1), GIRD1087 (3.2.1.5.1.5), GIRD1089 (3.2.1.5.1.5.0-1)

CCR #: 1241 Rev
CCB Status: **Approved**
CCB Date: 11/12/2008
Doc Change Date: 11/12/2008

Title: GIRD Update to Time Code Epoch Definition
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.5
DOORS Version: GIRD 2.17
DOORS ID #: GIRD455 (3.2.5.7.5.0-1)

CCR #: 1320 Rev
CCB Status: **Approved**
CCB Date: 3/23/2009
Doc Change Date: 3/23/2009

Title: GIRD Update to Applicable Documents
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C
Doc #: 417-R-GIRD-0009
Doc Section #: 2.1
DOORS Version: GIRD 2.18
DOORS ID #: GIRD11 (2.1.0-1)

CCR #: 1357 Rev
CCB Status: **Approved**
CCB Date: 6/04/2009
Doc Change Date: 6/04/2009

Title: GIRD – Deletion of GIRD165 Instrument Disturbance Allocation
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.2.7
DOORS Version: GIRD 2.19
DOORS ID #: Delete GIRD165 (3.2.1.7.2.3.0-1)

CCR #: 1497 Rev
CCB Status: **Approved**
CCB Date: 10/14/2009

Title: GIRD Spacecraft Time Message Packet
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C

Doc Change Date: 10/14/2009

Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.5
DOORS Version: GIRD 2.20
DOORS ID #: GIRD1221 (3.2.5.7.3.0-1)

CCR #: 1549 Rev
CCB Status: **Approved**
CCB Date: 12/01/2009
Doc Change Date: 12/01/2009

Title: GIRD - Change Header 3.2.1.7.2.3 to Reserved
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.1
DOORS Version: GIRD 2.21
DOORS ID #: GIRD164 (3.2.1.7.2.3)

CCR #: 1216 Rev
CCB Status: **Approved**
CCB Date: 3/24/2010
Doc Change Date: 3/24/2010

Title: GIRD – Technical Edits for Contamination
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.5.1, 3.5.2
DOORS Version: GIRD 2.22
DOORS ID #: GIRD801 (3.5.1.2.0-1), 834 (3.5.2.2.2.0-1), insert after 785 (1222 (3.5.1.1.0-1))

CCR #: 1629 Rev
CCB Status: **Approved**
CCB Date: 3/24/2010
Doc Change Date: 3/24/2010

Title: GIRD – Correct Flight Limit Acoustic Sound Pressure Level Table Labels
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.6
DOORS Version: GIRD 2.22
DOORS ID #: GIRD606 (3.2.6.2.7.0-2)

CCR #: 1670 Rev
CCB Status: **Approved**
CCB Date: 3/25/2010
Doc Change Date: 3/25/2010

Title: GIRD – Correct Flight Limit Acoustic Sound Pressure Level Table Labels
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.2.3
DOORS Version: GIRD 2.23
DOORS ID #: Modify: GIRD356 (3.2.3.2.2.1.1.0-4), 357 (3.2.3.2.2.1.1.0-5)
Insert after: GIRD353 (1223 (3.2.3.2.3.7.0-1)), (1224 (3.2.3.2.3.7.0-2)), (1225 (3.2.3.2.3.7))

CCR #: 1832 Rev
CCB Status: **Approved**
CCB Date: 10/28/2010
Doc Change Date: 11/04/2010

Title: GIRD – Orbit Reference Frame
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.3.3
DOORS Version: GIRD 2.24
DOORS ID #: Modify: GIRD660 (3.3.3.2.0-1)

CCR #: 1815 Rev
CCB Status: **Approved**
CCB Date: 11/04/2010
Doc Change Date: 11/04/2010

Title: GIRD – Yaw Steering Deletion
GOES S/C: R Effectivity: S/C & Instruments
Contract # NNG0 - 4HZ07C, 6HX01C, 7HW00C, 7HW20C, 8HZ00C, 9HR00C
Doc #: 417-R-GIRD-0009
Doc Section #: 3.1.4
DOORS Version: GIRD 2.24
DOORS ID #: Delete: GIRD1063 (3.1.4.0-5)